






- Underwater lights LED
- Fixtures
- Adjustable spot
- Waterproof spot lights
- LED lights
- Courtesy lights
- Wall lights
- Chart lights
- Reading lights
- LED strip
- Waterproof Bulbs
- Bulbs
- LED bulbs
- Lampholders
- Dimmer 12-24V DC
- Dimmer 115/230V AC



HIGH PERFORMANCE SPOTS


PROMETEO SERIES

Recessed spot for indoor and outdoor with treated brass ring galvanically, tempered glass, anodized aluminum heatsink and equipped with a parabola/directional lens.




QM

Dimensions	Supply	Power	Recessed	Lens	Color temp.	Code
67x67 mm	10-30V DC	6,5 W	Ø 58 mm	Standard 39°	3200 °K	RE 20210





QP

Dimensions	Supply	Power	Recessed	Lens	Color temp.	Code
55x55 mm	10-30V DC	3 W	Ø 47 mm	Standard 31°	3200 °K	RE 20211





T 90

Dimensions	Supply	Power	Recessed	Lens	Color temp.	Code
Ø 90 mm	10-30V DC	5 W	Ø 76 mm	Standard 44°	3200 °K	RE 20212





TG

Dimensions	Supply	Power	Recessed	Parabola	Color temp.	Code
Ø 74 mm	10-30V DC	5 W	Ø 62 mm	Standard 44°	3200 °K	RE 20213



TM

Dimensions	Supply	Power	Recessed	Lens	Color temp.	Code
Ø 58 mm	10-30V DC	6,5 W	Ø 44 mm	Standard 39°	3200 °K	RE 20214



TP

Dimensions	Supply	Power	Recessed	Lens	Color temp.	Code
Ø 48 mm	10-30V DC	3 W	Ø 38 mm	Standard 31°	3200 °K	RE 20215

ADJUSTABLE SPOTS

PHOENIX SERIES

Outdoor spot with galvanic treated brass body, anodized aluminum heatsink and round sandblasted glass diffuser.

		A									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Ø 89 mm</td> <td>10-30V DC</td> <td>3,6 W</td> <td>Ø 70 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20220</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	Ø 89 mm	10-30V DC	3,6 W	Ø 70 mm	White	3200 °K	RE 20220
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
Ø 89 mm	10-30V DC	3,6 W	Ø 70 mm	White	3200 °K	RE 20220																			
		AV									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Ø 89 mm</td> <td>10-30V DC</td> <td>3,6 W</td> <td>Ø 70 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20221</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	Ø 89 mm	10-30V DC	3,6 W	Ø 70 mm	White	3200 °K	RE 20221
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
Ø 89 mm	10-30V DC	3,6 W	Ø 70 mm	White	3200 °K	RE 20221																			
		B									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Ø 67 mm</td> <td>10-30V DC</td> <td>3 W</td> <td>Ø 54 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20222</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	Ø 67 mm	10-30V DC	3 W	Ø 54 mm	White	3200 °K	RE 20222
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
Ø 67 mm	10-30V DC	3 W	Ø 54 mm	White	3200 °K	RE 20222																			
		BV									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Ø 67 mm</td> <td>10-30V DC</td> <td>3 W</td> <td>Ø 54 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20223</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	Ø 67 mm	10-30V DC	3 W	Ø 54 mm	White	3200 °K	RE 20223
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
Ø 67 mm	10-30V DC	3 W	Ø 54 mm	White	3200 °K	RE 20223																			

KEPLERO SERIES



Outdoor spot with galvanic treated brass body, anodized aluminum heatsink and round sandblasted glass diffuser.

		I									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>76 x 76 mm</td> <td>10-30V DC</td> <td>3,6 W</td> <td>60 x 60 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20224</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	76 x 76 mm	10-30V DC	3,6 W	60 x 60 mm	White	3200 °K	RE 20224
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
76 x 76 mm	10-30V DC	3,6 W	60 x 60 mm	White	3200 °K	RE 20224																			
		II									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>131 x 76 mm</td> <td>10-30V DC</td> <td>2 x 3,6 W</td> <td>115 x 60 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20225</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	131 x 76 mm	10-30V DC	2 x 3,6 W	115 x 60 mm	White	3200 °K	RE 20225
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
131 x 76 mm	10-30V DC	2 x 3,6 W	115 x 60 mm	White	3200 °K	RE 20225																			
		III									<table border="1"> <thead> <tr> <th>Dimensions</th> <th>Supply</th> <th>Power</th> <th>Recesseded</th> <th>LED Color</th> <th>Color temp.</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>186 x 76 mm</td> <td>10-30V DC</td> <td>3 x 3,6 W</td> <td>170 x 60 mm</td> <td>White</td> <td>3200 °K</td> <td>RE 20226</td> </tr> </tbody> </table>	Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code	186 x 76 mm	10-30V DC	3 x 3,6 W	170 x 60 mm	White	3200 °K	RE 20226
Dimensions	Supply	Power	Recesseded	LED Color	Color temp.	Code																			
186 x 76 mm	10-30V DC	3 x 3,6 W	170 x 60 mm	White	3200 °K	RE 20226																			



RECESSEDED SPOTS

ASTEROPE SERIES

Indoor spot with technopolymer body, aesthetic ring in AISI 316 L stainless steel.

**G**



Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 152 mm	10-30V DC	5 W	Ø 132 mm	White	3200 °K	RE 20230

**M**


Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 105 mm	10-30V DC	2,5 W	Ø 81 mm	White	3200 °K	RE 20231

SEXTANS SERIES



Spot for interiors complete with aesthetic ring in treated brass galvanically, diffuser in sandblasted glass and equipped with a parabola to create diffused lighting.

**BIG S**



Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 90 mm	10-30V DC	5,5 W	Ø 80 mm	White	3200 °K	RE 20232

**S**

Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 76 mm	10-30V DC	3,6 W	Ø 61 mm	White	3200 °K	RE 20233

**SMALL TT**

Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 55 mm	10-30V DC	3 W	Ø 48 mm	White	3200 °K	RE 20234

**BERENICES**

Dimensions	Supply	Power	Recesseded	LED color	Color temp.	Code
Ø 87 mm	10-30V DC	3,6 W	Ø 73 mm	White	3200 °K	RE 20235



VELA
Outdoor ceiling light with base and ring in die-cast brass galvanically treated.



Dimensions	Height	Supply	Lamp	Power	Code
Ø 188 mm	52 mm	12/24 V	Halogen G 6.35	max 50 W	RE 20240



ANTARES 110
Indoor ceiling lamp with body in technopolymer, aesthetic ring in die-cast brass treated galvanically.



Dimensions	Height	Supply	Lamp	Power	LED Color	Color temp.	Code
Ø 110 mm	28 mm	10-30V DC	LED	4 W	White	6000 °K	RE 20241
Ø 110 mm	28 mm	12 - 24 V	Halogen G4	Max 10W	-	-	RE 20242




ANTARES 150
Indoor ceiling lamp with body in technopolymer, aesthetic ring in die-cast brass treated galvanically.




Dimensions	Height	Supply	Lamp	Power	LED Color	Color temp.	Code
Ø 150 mm	28 mm	10-30V DC	LED	4,5 W	White	6000 °K	RE 20243
Ø 150 mm	28 mm	12 - 24 V	Halogen G4	Max 20W	-	-	RE 20244




ASTERION B
Indoor ceiling lamp with body in technopolymer, aesthetic ring in die-cast brass treated galvanically.



Dimensions	Height	Supply	Lamp	Power	Switch	LED Color	Color temp.	Code
Ø 95 mm	28 mm	10-30V DC	LED	2,5 W	Yes	White	3200/4000 °K	RE 20245
Ø 95 mm	28 mm	12 - 24 V	Halogen G4	Max 10W	Yes	-	-	RE 20246

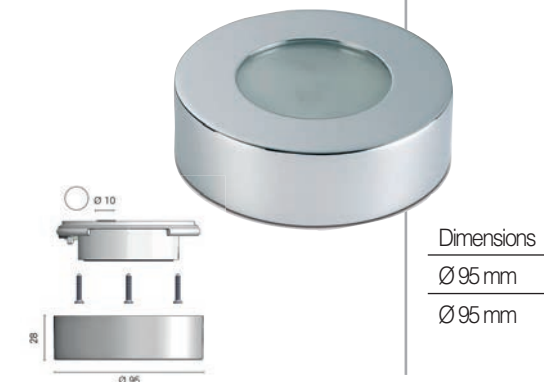

ASTERION C
Indoor ceiling lamp with body in technopolymer, aesthetic ring in die-cast brass treated galvanically.



Dimensions	Height	Supply	Lamp	Power	Switch	LED Color	Color temp.	Code
Ø 95 mm	28 mm	10-30V DC	LED	2,5 W	Yes	White	3200/4000 °K	RE 20247
Ø 95 mm	28 mm	12 - 24 V	Halogen G4	Max 10W	Yes	-	-	RE 20248

SPOTS EUROLED



EUROLED 75

Elegant and low energy consumption LED down lights for indoors and outdoors.
Warm White Light 2700K (red light on request).

Diameter	Finishing	Lamp	Supply	Power	Protection	Recesseded	Code
Ø 72 mm	Polished Steel	LED	12-24 VDC	3 W	IP6K7 & IP6K9K	Ø 50 x 16 mm	RE 20250
Ø 72 mm	White	LED	12-24 VDC	3 W	IP6K7 & IP6K9K	Ø 50 x 16 mm	RE 20251



EUROLED 95

Elegant and low energy consumption LED down lights for indoors and outdoors.
White light 5000K - Warm white light 3000K (red light on request).

ROUND TRIM

Diameter	Finishing	Lamp	Supply	Power	Protection	Recesseded	Code
Ø 95 mm	Polished Steel	LED	10-33 VDC	6 W	IP67	Ø 72 x 27,3 mm	RE 20252
Ø 95 mm	White	LED	10-33 VDC	6 W	IP67	Ø 72x 27,3 mm	RE 20253

SQUARE TRIM

Diameter	Finishing	Lamp	Supply	Power	Protection	Recesseded	Code
Ø 95 mm	Polished Steel	LED	10-33 VDC	6 W	IP67	Ø 72 x 27,3 mm	RE 20254
Ø 95 mm	White	LED	10-33 VDC	6 W	IP67	Ø 72x 27,3 mm	RE 20255



EUROLED 150

Elegant and low energy consumption LED down lights for indoors and outdoors.
Warm white light 3000K.

Diameter	Finishing	Lamp	Supply	Power	Protection	Recesseded	Code
Ø 150 mm	Polished Steel	LED	Multivolt 9-33 VDC	4 W	IP67	Ø 124 x 20 mm	RE 20256
Ø 150 mm	White	LED	Multivolt 9-33 VDC	4 W	IP67	Ø 124 x 20 mm	RE 20257



EUROLED TOUCH LAMPS WITH WHITE LIGHT

Sophisticated LED spotlights with touch technology, energy saving and ultra-resistant.
EuroLEDTouch spotlights provide white light using the new generation touch technology, waterproof.
White Light 5000K.

Diameter	Finishing	Lamp	Supply	Power	Protection	Distance of holes	Code
129,5 mm	Black	LED	Multivolt 9-33 Vdc	4 W	IP67	110 mm	RE 20259
129,5 mm	White	LED	Multivolt 9-33 Vdc	4 W	IP67	110 mm	RE 20260



**DURALED 12**

DuraLed lights provide intense white illumination, guaranteeing energy efficiency and constitute a safe and reliable alternative to incandescent and fluorescent lamps. Equipped with switch.




Lens color	LED color	Voltage	Consume	Dimensions	Code
White	5000° K	12 - 24V	2,5 W	140 x 65 x 32	RE 20980

**DURALED 20**

Lens color	LED color	Voltage	Consume	Dimensions	Code
White	20 white LED	9 - 33 V	4 W	177 x 100 x 30	RE 20988

**DURALED 36**

Lens color	LED color	Voltage	Consume	Dimensions	Code
White	5000° K	9 - 33 V	7 W	177 x 100 x 30	RE 20989

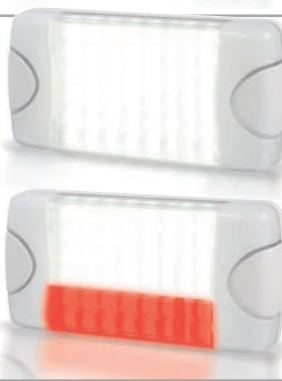**DURALED 50**

Available also bicolor.



Lens color	LED color	Voltage	Consume	Dimensions	Code
White	5000° K	9 - 33 V	10 W	177 x 100 x 30	RE 20990
White/Red	5000° K/Red	9 - 33 V	10 W	177 x 100 x 30	RE 20991


**KIRK**

Description	Finish	Bulb	Supply	Protection	Dimensions	Code
Storeroom light	Silver grey	48 LED	3 battery AA 1,5 V	IP40	135 x 19,5	RE 20358

**ACTION 5W - 10W**

Model	LED color	Voltage	Consume	Dimensions	Code
5 W	Natural white	9 - 16 V	5 W	116 x 140 x 13	RE 20992
10 W	Natural white	9 - 16 V	10 W	116 x 140 x 13	RE 20993
10 W	Natural white	18 - 32 V	10 W	116 x 140 x 13	RE 20994




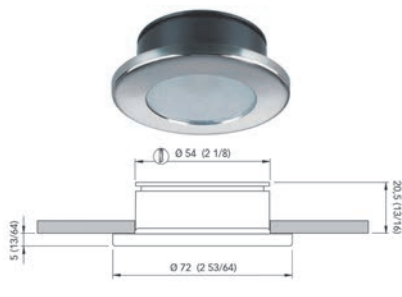

TED V 95° STAINLESS STEEL

Standard LED light natural white or hot + colored courtesy light - Dimmable


Diameter	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 72 mm	Polished	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21046
Ø 72 mm	Frosted	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21047
Ø 72 mm	White	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21048

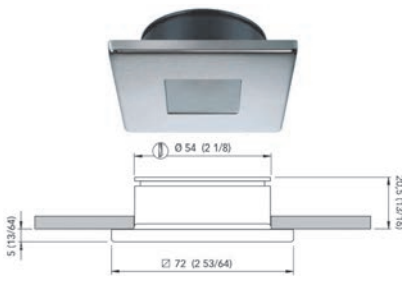

EDWIN V 95° STAINLESS STEEL

Standard LED light natural white or hot + colored courtesy light - Dimmable


Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	polished	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21049
72 x 72 mm	frosted	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21050
72 x 72 mm	white	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21051

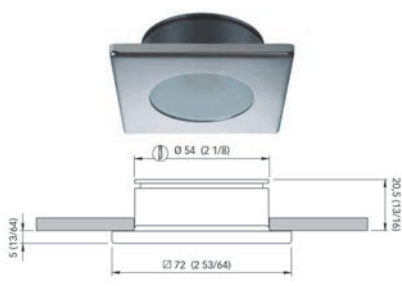

BRYAN V 95° STAINLESS STEEL

Standard LED light natural white or hot + colored courtesy light - Dimmable


Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	Polished	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21052
72 x 72 mm	Frosted	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21053
72 x 72 mm	White	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21054

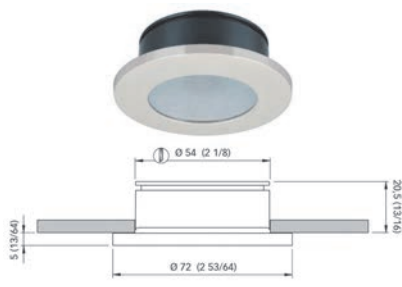

TED VN COMPOSITE MATERIAL

Standard LED light natural white or hot + colored courtesy light - Dimmable


Diameter	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 72 mm	White	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21055
Ø 72 mm	Titanium met.	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21056

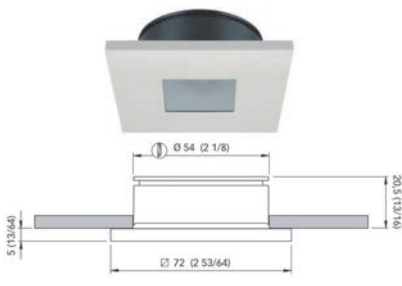

EDWIN VN COMPOSITE MATERIAL

Standard LED light natural white or hot + colored courtesy light - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21057
72 x 72 mm	Titanium met.	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21058

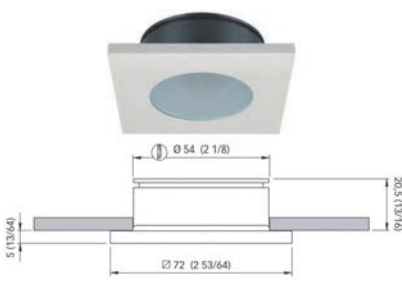

BRYAN VN COMPOSITE MATERIAL

Standard LED light natural white or hot + colored courtesy light - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21060
72 x 72 mm	Titanium met.	10 - 30V DC	4 W	IP66	20,5 mm	Ø 54 mm	RE 21061

SPOTS NICE SERIES



TED N

Standard light LED natural white or hot - Dimmable

Diameter	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 72 mm	White	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21030
Ø 72 mm	Titanium met.	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21031



TED NT

Standard LED natural white light or hot - Touch button - Dimmable

Diameter	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 72 mm	Titanium met.	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21033



TED N DUAL

Standard LED natural white light or hot - Double LED - Dimmable

Diameter	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 72 mm	White	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21034
Ø 72 mm	Titanium met.	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21035



EDWIN N

Standard LED natural white light or hot - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21036
72 x 72 mm	Titanium met.	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21037



EDWIN N DUAL

Standard LED natural white light or hot - Double LED - Dimmable


Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21038
72 x 72 mm	Titanium met.	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21039



BRYAN N

Standard LED natural white light or hot - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21040
72 x 72 mm	Titanium met.	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21041



BRYAN NT

Standard LED natural white light or hot - Touch button - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	Titanium met.	10 - 30V DC	2W	IP66	14 mm	Ø 54 mm	RE 21043




BRYAN N DUAL

Standard LED natural white light or hot - Double LED - Dimmable

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
72 x 72 mm	White	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21044
72 x 72 mm	Titanium met.	10 - 30V DC	2W + 2W	IP66	14 mm	Ø 54 mm	RE 21045

RECESSEDED LED LIGHTS CLUB SERIES



They have a very low Recessed and are suitable for any type of application. Made of stainless steel.

TED C

Standard LED daylight (warm light, cool white or red available on request).

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
Ø 72	Steel Polished	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20301/L
Ø 72	Steel Satin	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20302/L
Ø 72	White 9010	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20303/L

FINISHES: On request:




TED CT

Standard LED daylight (warm light or red available on request) - Equipped with touch button.

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
Ø 72	Steel Polished	Power LED	10 - 30V DC	2 W	IP66	Ø 54 x 14 mm	RE 20619
Ø 72	Steel Satin	Power LED	10 - 30V DC	2 W	IP66	Ø 54 x 14 mm	RE 20620
Ø 72	White 9010	Power LED	10 - 30V DC	2 W	IP66	Ø 54 x 14 mm	RE 20621

FINISHES:




BRYAN C

Standard LED daylight (warm light, cool white or red available on request).

Dimensions	Finish	Bulbs	Voltage	Power	Protection	Recessed	Code
72 x 72	Mirror polished	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20313/L
72 x 72	Satined	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20314/L
72 x 72	White 9010	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20315/L

FINISHES:

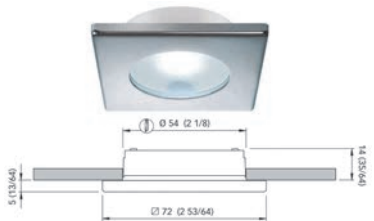

BRYAN CT

Standard LED daylight (warm light, cool white or red available on request) - Touch button - Dimmable.

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
72 x 72	Mirror polished	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20936
72 x 72	Satined	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20937
72 x 72	White 9010	Power LED	10 - 30 V	2 W	IP66	Ø 54 x 14 mm	RE 20938

FINISHES:



MIRIAM C

Standard LED daylight (warm light, cool white or red available on request).

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 77	Mirror polished	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20361/L
Ø 77	Satined	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20362/L
Ø 77	White 9010	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20363/L
Ø 77	Black nickel PVD	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20364/L

FINISHES: On request:






SELENE CS

Standard LED daylight (warm light, cool white or red available on request).

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 77	Mirror polished	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20365/L
Ø 77	Satined	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20366/L
Ø 77	White 9010	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20367/L
Ø 77	Black nickel PVD	Power LED	10 - 30 V	2 W	IP40	Ø 54 x 16 mm	RE 20368/L

FINISHES:

RECESSEDED LED ROUND SERIES



CHIARA

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 87	Mirror polished	Power LED	10 - 30 V	4 W	IP66	Ø 65 x 28 mm	RE 20388
Ø 87	Satined	Power LED	10 - 30 V	4 W	IP66	Ø 65 x 28 mm	RE 20389
Ø 87	White 9010	Power LED	10 - 30 V	4 W	IP66	Ø 65 x 28 mm	RE 20383
Ø 87	Mirror polished	Power LED	10 - 30 V	6 W	IP66	Ø 65 x 41 mm	RE 20346
Ø 87	Satined	Power LED	10 - 30 V	6 W	IP66	Ø 65 x 41 mm	RE 20347
Ø 87	White 9010	Power LED	10 - 30 V	6 W	IP66	Ø 65 x 41 mm	RE 20348

FINISHES: On request:

CRISTIAN

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 102	Mirror polished	Power LED	10 - 30 V	7 W	IP40	Ø 89 x 55	RE 20494
Ø 102	Mirror polished	Power LED	10 - 30 V	12 W	IP40	Ø 89 x 70,5	RE 20477

FINISHES:

SONIA

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 105	Mirror polished	Power LED	10 - 30 V	4 W	IP66	Ø 79 x 34 mm	RE 20392
Ø 105	White 9010	Power LED	10 - 30 V	4 W	IP66	Ø 79 x 34 mm	RE 20393
Ø 105	Mirror polished	Power LED	10 - 30 V	9 W	IP66	Ø 79 x 57,5 mm	RE 20390
Ø 105	White 9010	Power LED	10 - 30 V	9 W	IP66	Ø 79 x 57,5 mm	RE 20391

FINISHES:

THEKLA LUX

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 155	Mirror polished	Power LED	10 - 30 V	9 W	IP66	Ø 114 x 25 mm	RE 20616
Ø 155	Satined	Power LED	10 - 30 V	9 W	IP66	Ø 114 x 25 mm	RE 20617
Ø 155	White 9010	Power LED	10 - 30 V	9 W	IP66	Ø 114 x 25 mm	RE 20618

FINISHES:

KLEOS 180 12W

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 180	Mirror polished	Power LED	20 - 30 V	12 W	IP66	Ø 132 x 35 mm	RE 20438
Ø 180	Satined	Power LED	20 - 30 V	12 W	IP66	Ø 132 x 35 mm	RE 20439
Ø 180	White 9010	Power LED	20 - 30 V	12 W	IP66	Ø 132 x 35 mm	RE 20440

FINISHES: On request:

KLEOS 235 15W

Standard LED daylight (warm light available on request)

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 235	Mirror polished	Power LED	20 - 30 V	15 W	IP66	Ø 185 x 42 mm	RE 20441
Ø 235	Satined	Power LED	20 - 30 V	15 W	IP66	Ø 185 x 42 mm	RE 20442
Ø 235	White 9010	Power LED	20 - 30 V	15 W	IP66	Ø 185 x 42 mm	RE 20443

FINISHES: On request:

RECESSEDED LED DOWNLIGHTS ADJUSTABLE




YOKO

Standard natural white light (warm light on request)

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Dimensions	Code
Ø 65	Steel polished	Power led	10 - 30 V	1,5 W	IP40	Ø 52 x 35 mm	RE 20497
Ø 65	Steel satin	Power led	10 - 30 V	1,5 W	IP40	Ø 52 x 35 mm	RE 20498

FINISHES:




LUCILLE

Standard natural white light (warm light on request)

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Dimensions	Code
Ø 65	Steel polished	Power LED	10 - 30 V	1,5 W	IP40	Ø 52 x 33 mm	RE 20466
Ø 65	Steel satin	Power LED	10 - 30 V	1,5 W	IP40	Ø 52 x 33 mm	RE 20467


FINISHES:



NIKITA

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 85	Mirror polished	Power LED	10 - 30 V	4 W	IP40	Ø 70 x 42 mm	RE 20349
Ø 85	Satined	Power LED	10 - 30 V	4 W	IP40	Ø 70 x 42 mm	RE 20350
Ø 85	Mirror polished	Power LED	10 - 30 V	9 W	IP40	Ø 70 x 74,5 mm	RE 20354
Ø 85	Satined	Power LED	10 - 30 V	9 W	IP40	Ø 70 x 74,5 mm	RE 20355

FINISHES: On request:




REGINA

Adjustable. Standard LED daylight (warm light available on request)

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
85x85 mm	Mirror polished	Power LED	10 - 30 V	4 W	IP40	Ø 70 x 42 mm	RE 20893
85x85 mm	Satined	Power LED	10 - 30 V	4 W	IP40	Ø 70 x 42 mm	RE 20864
85x85 mm	Mirror polished	Power LED	10 - 30 V	9 W	IP40	Ø 70 x 71 mm	RE 20933
85x85 mm	Satined	Power LED	10 - 30 V	9 W	IP40	Ø 70 x 71 mm	RE 20934

FINISHES: On request:

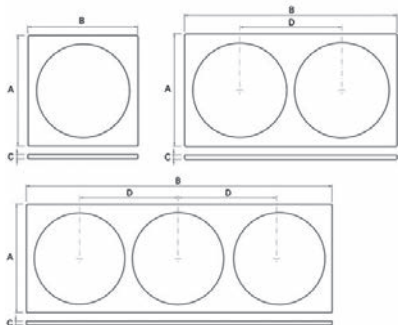

NK FRAME

The spotlights Nikita are not included in the package.

Lights N°	Finish	Dimensions	Code
1	Steel polished	100 (a) x 100 (b) x 4 (c) mm	RE 20870
1	Steel satin	100 (a) x 100 (a) x 4 (c) mm	RE 20871
2	Steel polished	100 (a) x 192 (b) x 4 (c) mm	RE 20873
2	Steel satin	100 (a) x 192 (b) x 4 (c) mm	RE 20874
3	Steel polished	100 (a) x 284 (b) x 4 (c) mm	RE 20876
3	Steel satin	100 (a) x 284 (b) x 4 (c) mm	RE 20877




VANESSA

Daylight or warm light, if requested.

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
112 x 112	Mirror polished	Power LED	10 - 30 V	7 W	IP40	90 x 90 x 64,5 mm	RE 20609
112 x 112	White 9010	Power LED	10 - 30 V	7 W	IP40	90 x 90 x 64,5 mm	RE 20611
112 x 112	Polished stainless	Power LED	10 - 30 V	12 W	IP40	90 x 90 x 92 mm	RE 20404
112 x 112	White 9010	Power LED	10 - 30 V	12 W	IP40	90 x 90 x 92 mm	RE 20405

FINISHES: On request:

RECESSEDED MINI SPOT SERIES




ELY

Standard LED daylight (warm light available on request).

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 39,5	Steel polished	Power LED	10 - 30 V	3 W	IP65	Ø 30 x 35,7 mm	RE 20495
Ø 39,5	Steel satin	Power LED	10 - 30 V	3 W	IP65	Ø 30 x 35,7 mm	RE 20496

FINISHES:



JO

Daylight or warm light, if requested.

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
Ø 42	Steel polished	Power LED	10 - 30 V	1,5 W	IP65	25 x 19	RE 20606
Ø 42	Steel satin	Power LED	10 - 30 V	1,5 W	IP65	25 x 19	RE 20607

FINISHES:




JD

Daylight or warm light, if requested.

Dimens.	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
36 x 36	Mirror Polished	Power LED	10 - 30 V	1,5 W	IP65	25 x 19	RE 20603
36 x 36	Satin	Power LED	10 - 30 V	1,5 W	IP65	25 x 19	RE 20604
36 x 36	White 9010	Power LED	10 - 30 V	1,5 W	IP65	25 x 19	RE 20605

FINISHES:




ERICA 1

Standard LED daylight (warm light available on request).

Dimens.	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
50 x 50	Mirror polished	Power LED	10 - 30 V	2 W	IP65	Ø 40 x 35mm	RE 20879
50 x 50	Satined	Power LED	10 - 30 V	2 W	IP65	Ø 40 x 35mm	RE 20880

FINISHES:




ERICA 2

Standard LED daylight (warm light available on request).

Dimens.	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
50 x 100	Mirror polished	Power LED	10 - 30 V	4 W	IP65	Ø 40 x 35mm	RE 20881
50 x 100	Satined	Power LED	10 - 30 V	4 W	IP65	Ø 40 x 35mm	RE 20882

FINISHES:

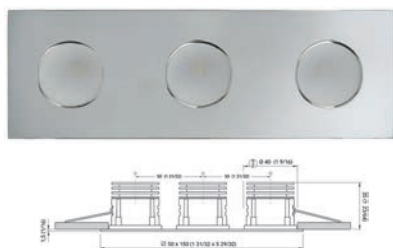


ERICA 3

Standard LED daylight (warm light available on request).

Dimens.	Finishing	Bulbs	Voltage	Power	Protection	Recessed	Code
50 x 150	Mirror polished	Power LED	10 - 30 V	6 W	IP65	Ø 40 x 35mm	RE 20883
50 x 150	Satined	Power LED	10 - 30 V	6 W	IP65	Ø 40 x 35mm	RE 20884

FINISHES:


RECESSEDED GLASS SERIES

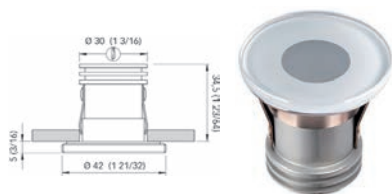

HONEY LP

LED light made in aluminum, available in 2 light colors, suitable for ceiling and wall installation. The diffuser, made with tempered glass, gives the product a particularly refined look.


Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 42 mm	Tempered glass	Power LED	10 - 30 V	3 W	IP65	Ø 30 x 34,5 mm	RE 20469

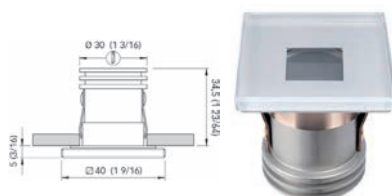

SUGAR LP

Square built-in courtesy light made with 316 AISI stainless steel and temperate glass. The exclusive design, effective illumination and optimal chromatic yield made the product particularly elegant and refined.

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
40x40 mm	Tempered glass	Power LED	10 - 30 V	3 W	IP65	Ø 30 x 34,5 mm	RE 20470



APOLLO XP LP

Modern series of power LED downlights. The diffuser, made with tempered glass, gives the product a particularly refined look. With IP66 rating, it is protected against humidity and water splashes, if installed properly.

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 90 mm	Tempered glass	Power LED	10 - 30 V	6 W	IP66	Ø 65 x 30 mm	RE 20471



ZEUS LP

Modern series of power LED downlights (warm light available on request).

Diameter	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
Ø 102 mm	Tempered glass	Power LED	10 - 30 V	7 W	IP40	Ø 89 x 55 mm	RE 20472
Ø 102 mm	Tempered glass	Power LED	10 - 30 V	12 W	IP40	Ø 89 x 70,5 mm	RE 20473



DAPHNE LP

Standard LED daylight (warm light available on request).

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
86 x 86	Glass	Power LED	10 - 30 V	4 W	IP65	60 x 66 x 27 mm	RE 20894



DANAE LP

Standard LED daylight (warm light available on request).

Dimensions	Finish	Bulb	Voltage	Power	Protection	Recessed	Code
112 x 112	Glass	Power LED	10 - 30 V	7 W	IP40	90 x 90 x 57,5 mm	RE 20895
112 x 112	Glass	Power LED	10 - 30 V	12 W	IP40	90 x 90 x 72,9 mm	RE 20409

DOWNLIGHTS

SURFACE



UTILITY LIGHT SERIES - TATI

Standard natural white light.

Dimensions	Finishing	Bulbs	Voltage	Power	Protection	Thickness	Code
61 x 61 mm	Chromed plastic	Power LED	10 - 15 V	2 W	IP40	14,5 mm	RE 20896
61 x 61 mm	White 9010 plastic	Power LED	10 - 15 V	2 W	IP40	14,5 mm	RE 20897



UTILITY LIGHT SERIES - MIRÒ

Standard natural white light.

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 64	Chromed plastic	Power LED	10 - 15 V	2 W	IP40	14,5 mm	RE 20898
Ø 64	White 9010 plastic	Power LED	10 - 15 V	2 W	IP40	14,5 mm	RE 20899



CLUB SERIES - BARBIE C

Standard natural white light (warm light on request).

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 72,5	Steel polished	Power LED	10 - 30 V	2 W	IP66	20,5 mm	RE 20925

CLUB SERIES - BARBIE C DUAL

Standard natural white light (warm light on request). Equipped with two LED lights.

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 72,5	Steel satin	Power LED	10 - 30 V	2 W + 2 W	IP66	20,5 mm	RE 20926



CLUB SERIES - TIM CS

Standard natural white light (warm light and red light on request). Supply 24V on request. With switch.

Diameter	Finish	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 90	Mirror polished	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20450
Ø 90	Satined	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20451
Ø 90	White 9010	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20452

CLUB SERIES - TIM C

Standard natural white light (warm light and red light on request). Supply 24V on request. Without switch.

Diameter	Finishing	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 90	Polished steel	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20927
Ø 90	Satined steel	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20928
Ø 90	White 9010	Power LED	10 - 30 V	2 W	IP40	22 mm	RE 20929



CLUB SERIES - MINDY CS


Daylight or warm light or red light, if requested. With switch.

Diameter	Finish	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 90	Mirror polished	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20622
Ø 90	Satined	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20623
Ø 90	White 9010	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20624

CLUB SERIES - MINDY C


Daylight or warm light or red light, if requested. Without switch.

Diameter	Finish	Bulbs	Voltage	Power	Protection	Thickness	Code
Ø 90	Mirror polished	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20930
Ø 90	Satined	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20931
Ø 90	White 9010	Power LED	10 - 30 V	2 W	IP40	25 mm	RE 20932

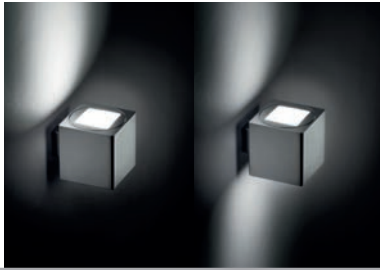


QB SERIES - FIXED

Natural white light (warm white on request)




Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10-30 V	2 LED	4 W	IP40	65 x 65 x 80	RE 20823
Chromed aluminum	10-30 V	1 Power LED	4 W	IP40	65 x 65 x 80	RE 20824

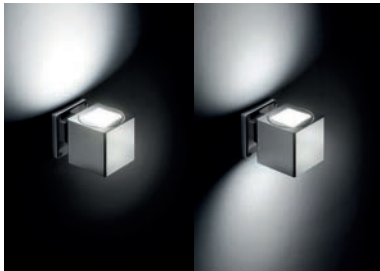


QB SERIES - SPIN

Natural white light (warm white on request)




Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10-30 V	2 LED	4 W	IP40	65 x 65 x 90	RE 20825
Chromed aluminum	10-30 V	1 Power LED	4 W	IP40	65 x 65 x 90	RE 20826

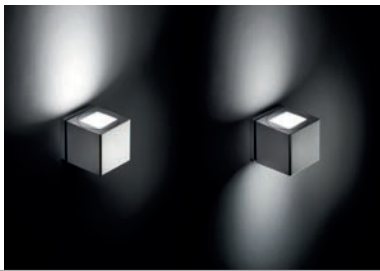


QB SERIES - COMPASS

Natural white light (warm white on request)




Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10 - 30 V	2 LED	4 W	IP40	65 x 65 x 75	RE 20827
Chromed aluminum	10 - 30 V	1 Power LED	4 W	IP40	65 x 65 x 75	RE 20828

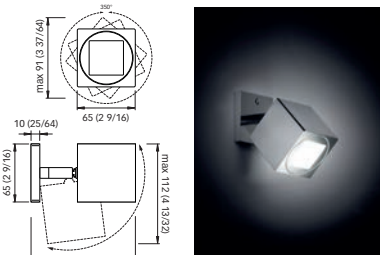

QB SERIES - SWIVEL

Natural white light (warm white on request)




Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10 - 30 V	1 LED	2W	IP40	65 x 65 x 117	RE 20829
Chromed aluminum	10 - 30 V	1 Power LED	4W	IP40	65 x 65 x 117	RE 20830



QB SERIES - TWINS


Natural white light (warm white on request)

Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10 - 30 V	2 LED	4 W	IP40	65 x 145 x 80	RE 20831
Chromed aluminum	10 - 30 V	2 Power LED	8 W	IP40	65 x 145 x 80	RE 20832

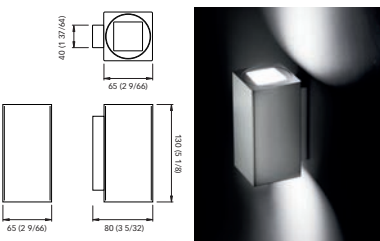


QB SERIES - TOWER

Natural white light (warm white on request)




Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10 - 30 V	2 LED	4 W	IP40	65 x 130 x 80	RE 20833
Chromed aluminum	10 - 30 V	2 Power LED	8 W	IP40	65 x 130 x 80	RE 20834

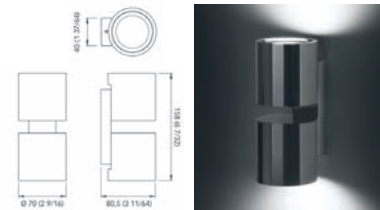

TB SERIES - TWINS

Natural white light



Finish	Supply	Light number	Consume	Protection	Dimensions	Code
Chromed aluminum	10 - 30 V	2 Power LED	8 W	IP40	65 x 145 x 80	RE 20841


LED READING LIGHTS WITH SWITCH

Quick
MARINE LIGHTING



ADJUSTABLE SERIES - OLIVIA

White natural color or warm light, if requested.




Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 50	Polished steel	Power LED	10 - 30 V	2,5 W	IP40	Aluminum	RE 20478



ADJUSTABLE SERIES - JACOB

White natural color or warm light, if requested.



Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 50	Polished steel	Power LED	10 - 30 V	2,5 W	IP40	Aluminum	RE 20903



ADJUSTABLE SERIES - ROBIN


Natural white light standard (warm light on request).

Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 60	Chromed	Power LED	10 - 30 V	2,5 W	IP40	Comp. material	RE 20904
Ø 60	Metallic dark gray	Power LED	10 - 30 V	2,5 W	IP40	Comp. material	RE 20905



ADJUSTABLE SERIES - NICOLE


Daylight or warm light, if requested.



Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 72	Chromed	Power LED	10 - 30 V	1,2 W	IP40	Aluminum	RE 20398
Ø 72	Satined	Power LED	10 - 30 V	1,2 W	IP40	Aluminum	RE 20399



ADJUSTABLE SERIES - JOYCE



Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 47	Chromed	Power LED	10 - 30 V	10 W	IP40	Aluminum	RE 20664


MAYA 30/60 Daylight or warm light, if requested.

Base dimensions	Model	Bulb	Supply	Power	Protection	Material	Code
Ø 50	MAYA 30	6 LED	10 - 30 V	1,2 W	IP40	Aluminum	RE 20397
Ø 50	MAYA 60	6 LED	10 - 30 V	1,2 W	IP40	Aluminum	RE 20353


REBECCA

Reading light with wall mounted, adjustable, head and base in white composite material, arm in silicone available in various colors.



Dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
485 x 30 mm	Silicone	LED	10 - 30 V	1,5 W	IP40	Comp. bianco	RE 20665


AUDREY

White natural Color

Finishes: black or brown leather or black neoprene.

Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 55	Chromed	Power LED	10 - 30 V	1,5 W	IP40	Brass	RE 20484
Ø 55	Silver	Power LED	10 - 30 V	1,5 W	IP40	Aluminum	RE 20661


AUDREY WALL WHITE USB

White natural Color

Finishes: black or brown leather or black neoprene.



Base dimensions	Finish	Bulb	Supply	Power	Protection	Material	Code
Ø 29 x 63	Chromed	Power LED	10 - 30 V	1,5 W	IP40	Aluminum	RE 20479


SHARK 30/50 POWER

Bi-color: cool white/red.

Flexible arm dimensions	Color	Bulb	Supply	Power	Protection	Material	Code
200 mm	Black	Power LED	10 - 30 V	1,5 W	IP40	Composite	RE 20662
400 mm	Black	Power LED	10 - 30 V	1,5 W	IP40	Composite	RE 20663


CALIFFA - CALIFFA WALL

White natural color.


Coating on request: black leather, brown skin and white skin.

Touch switch to operate two different colors of light.

The Califfa model can be installed on floor; the model Califfa Wall is designed for wall mounting.




Model	Finish	Bulb	Supply	Power	Protection	Material	Code
Califfa	Chromed	Power LED	10 - 30 V	1,5 W	IP40	Stainless steel	RE 20639
Califfa wall	Chromed	Power LED	10 - 30 V	1,5 W	IP40	Stainless steel	RE 20645



TINA

Daylight (warm white, red or blue if requested)


Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
Ø 20	Mirror polished	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20679
Ø 20	Satined	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20680
Ø 20	White 9010	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20681



GAIA

Daylight (warm white if requested)


Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
Ø 36	Polished steel	10 - 30 V	3,5 W	0,125 A	IP65	Ø 32 x 40	RE 20647



MARGOT 1L/2L

Daylight (warm white if requested)


Model	Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
1 LED	Ø 38	Polished steel	10 - 30 V	0,5 W	0,02 A	IP65	Ø 22 x 24	RE 20906
1 LED	Ø 38	Satined steel	10 - 30 V	0,5 W	0,02 A	IP65	Ø 22 x 24	RE 20907
2 LED	Ø 38	Polished steel	10 - 30 V	1 W	0,04 A	IP65	Ø 22 x 24	RE 20908
2 LED	Ø 38	Satined steel	10 - 30 V	1 W	0,04 A	IP65	Ø 22 x 24	RE 20909



PATRICIA

Daylight (warm white, red or blue if requested)


Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
Ø 40	Plastic	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20444



HARRIET POWER LED

Daylight (warm white or blue if requested)


Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
Ø 44	Polished steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20669
Ø 44	Satined steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20670
Ø 44	White 9010	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20671



GRACE 1L/2L POWER LED

Daylight (warm white or blue if requested)

Model	Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
1 LED	Ø 44	Polished steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20666
1 LED	Ø 44	Satined steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20667
1 LED	Ø 44	White 9010	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20668
2 LED	Ø 44	Polished steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20910
2 LED	Ø 44	Satined steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20911
2 LED	Ø 44	White 9010	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20912



IRENE

Daylight (warm white, red or blue if requested)


Diameter	Finish	Voltage	Power	Absorption	Protection	Recessed	Code
Ø 45	Mirror polished	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20445
Ø 45	Satined	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20672
Ø 45	White 9010	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20673



TESS

Daylight (warm white, red or blue if requested)


Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
15,5 x 15,5	Mirror polished	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20676
15,5 x 15,5	Satined	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20677
15,5 x 15,5	White 9010	10 - 30 V	0,48 W	0,02 A	IP65	Ø 12 x 13	RE 20678

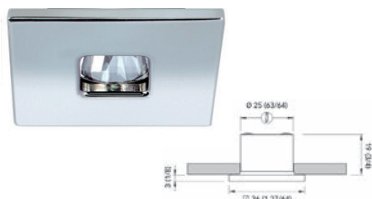

LIDA

Daylight (warm white if requested)


Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
36 x 36	Polished Steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 19	RE 20913
36 x 36	Satined Steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 19	RE 20914

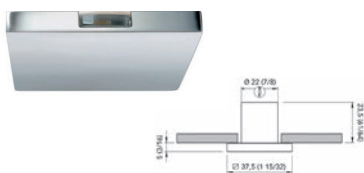

GWENDA 1L/2L

Daylight (warm white if requested)


Model	Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
1 LED	37,5 x 37,5	Chromed steel	10 - 30 V	0,50 W	0,02 A	IP65	Ø 22x23,5	RE 20915
1 LED	37,5 x 37,5	Satined Steel	10 - 30 V	0,50 W	0,02 A	IP65	Ø 22x23,5	RE 20916
2 LED	37,5 x 37,5	Chromed steel	10 - 30 V	1 W	0,04 A	IP65	Ø 22x23,5	RE 20917
2 LED	37,5 x 37,5	Satined Steel	10 - 30 V	1 W	0,04 A	IP65	Ø 22x23,5	RE 20918

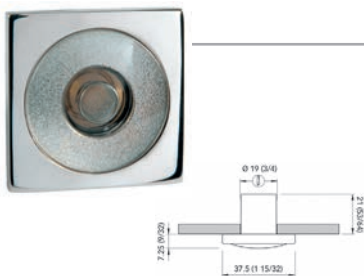

ILENIA

Daylight (warm white, red or blue if requested)

Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
37,5 x 37,5	Polished Steel	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20446
37,5 x 37,5	Satined Steel	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20674
37,5 x 37,5	White 9010	10 - 30 V	0,48 W	0,02 A	IP65	Ø 19 x 21	RE 20675

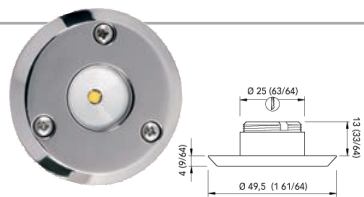

VITO

Standard natural white light (warm light, cold light on request).


Diameter	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
Ø 49,5	Polished Steel	10 - 30V DC	1,5 W	350 mA	IP67	Ø 25 x 14	RE 20923



HALLIE POWER LED

Daylight (warm white or blue if requested)

Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
43 x 43	Polished Steel	8 - 30 V	1,5 W	0,12 A	IP65	Ø 25 x 3	RE 20685
43 x 43	Satined Steel	8 - 30 V	1,5 W	0,12 A	IP65	Ø 25 x 3	RE 20686
43 x 43	White 9010	8 - 30 V	1,5 W	0,12 A	IP65	Ø 25 x 3	RE 20687

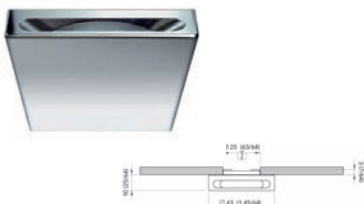


GLADIS 1L/2L POWER LED

Daylight (warm white or blue if requested)

Dimensions	Finish	Voltage	Consume	Absorption	Protection	Recessed	Code
43 x 43	Polished Steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20682
43 x 43	Satined Steel	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20683
43 x 43	White 9010	10 - 30 V	1,5 W	0,06 A	IP65	Ø 25 x 3	RE 20684


TAB

SERIES CPA 1




Finish	LED color	Voltage	Power	Dimensions	Code
Chromed plastic	Natural white	10 - 30 V	1 W	69x15x8,5 mm	RE 20801
Chromed plastic	Red	10 - 30 V	1 W	69x15x8,5 mm	RE 20802
Chromed plastic	Blue	10 - 30 V	1 W	69x15x8,5 mm	RE 20803

SERIES CPA 3




Finish	LED color	Voltage	Power	Dimensions	Code
Chromed plastic	Natural White	10 - 30 V	1 W	69x15x8,5 mm	RE 20804
Chromed plastic	Red	10 - 30 V	1 W	69x15x8,5 mm	RE 20805
Chromed plastic	Blue	10 - 30 V	1 W	69x15x8,5 mm	RE 20806

SERIES CPR 1




Finish	LED color	Voltage	Power	Dimensions	Code
Chromed plastic	Natural white	10 - 30 V	1 W	69x15x8,5 mm	RE 20807
Chromed plastic	Red	10 - 30 V	1 W	69x15x8,5 mm	RE 20808
Chromed plastic	Blue	10 - 30 V	1 W	69x15x8,5 mm	RE 20809

SERIES CPR 2




Finish	LED color	Voltage	Power	Dimensions	Code
Chromed plastic	Natural white	10 - 30 V	1 W	69x15x8,5 mm	RE 20810
Chromed plastic	Red	10 - 30 V	1 W	69x15x8,5 mm	RE 20811
Chromed plastic	Blue	10 - 30 V	1 W	69x15x8,5 mm	RE 20812

SERIES SSR 1




Finish	LED color	Voltage	Power	Dimensions	Code
Polished Steel	Natural white	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20813
Polished Steel	Red	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20814
Polished Steel	Blue	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20815

SERIES SSR 2




Finish	LED color	Voltage	Power	Dimensions	Code
Polished Steel	Natural white	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20816
Polished Steel	Red	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20817
Polished Steel	Blue	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20818

SERIES SSR 4



Finish	LED color	Voltage	Power	Dimensions	Code
Polished Steel	Natural white	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20920
Polished Steel	Red	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20921
Polished Steel	Blue	10 - 30 V	1 W	68 x 14 x 8 mm	RE 20922

LED LIGHTS

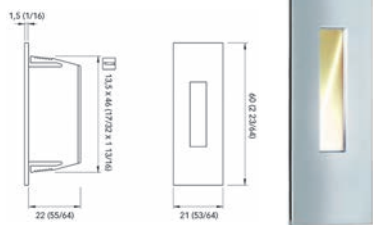

TILL

Daylight standard (red or blue if requested)

Dimensions mm	Finish	Supply	Power	Absorption	Protection	Recessed	Code
60 x 21	Polished Steel	10-30 V	0,5 W	0,02A	IP40	46 x 14 mm	RE 20822



EYELID

Daylight standard (red or blue if requested)

Finish	Supply	Power	Absorption	Protection	Dimensions	Code
Polished Steel	10-30 V	0,5 W	0,02A	IP65	46 x 33 x 8,5	RE 20820
White 9010	10-30 V	0,5 W	0,02A	IP65	46 x 33 x 8,5	RE 20821



EDEL


Light color: natural white or warm white

Finish	Supply	Power	Protection	Dimensions	Code
Polished steel	12 V	1 W	IP65	77,5 x 38 x 6 mm	RE 20835
White 9010	12 V	1 W	IP65	77,5 x 38 x 6 mm	RE 20836



VENUS 72

Light color: natural white or warm white



Diameter	Finish	Supply	Power	Protection	Recessed	Code
Ø 72 mm	Satined steel	10 - 30 V	4 W	IP66	Ø 54 x 20,5 mm	RE 20837




VENUS 88

Light color: natural white or warm white



Diameter	Finish	Supply	Power	Protection	Recessed	Code
Ø 88 mm	Satined steel	10 - 30 V	6 W	IP66	Ø 65 x 41 mm	RE 20838



SECRET LIGHT

Standard warm white light.

Diameter	Finish	Bulb	Supply	Power	Protection	Dimensions	Code
Ø 88	Polished steel	36 LED	10-30 V	9 W	IP66	Ø 67 x 218 mm	RE 20842
Ø 88	Polished steel	36 LED	10-30 V	6 W	IP66	Ø 67 x 218 mm	RE 20843




SECRET LIGHT L

Standard warm white light.

Diameter	Finish	Supply	Power	Protection	Recessed	Code
Ø 199	Polished steel	10 - 30 V	6 W	IP66	Ø 148 x 235 mm	RE 20844



APPLIQUE DOMINIQUE 15-9 *




Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	170 x 195	RE 20702
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	170 x 195	RE 20703



APPLIQUE DOMINIQUE 15-30 *

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	215 x 405	RE 20704
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	215 x 405	RE 20705



APPLIQUE DOMINIQUE 18-30 *

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	226 x 420	RE 20706
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	226 x 420	RE 20707


APPLIQUE DOMINIQUE 22-35 *

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	246 x 490	RE 20708
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	246 x 490	RE 20709



APPLIQUE DOMITILLA 12-25

On request: lampshade sand, brown, red color




Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	210 x 340	RE 20710
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	210 x 340	RE 20711
Chromed brass	Linen	1xE14	110/220V	25 W	IP40	210 x 340	RE 20712
Chromed brass - Gold plated	Linen	1xE14	110/220V	25 W	IP40	210 x 340	RE 20713



APPLIQUE DOMIZIANA 15-30

On request: lampshade sand, brown, red color




Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimens.	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	245 x 405	RE 20714
Chromed brass - Gold plated	Linen	1xB15d	12-24 V	20 W	IP40	245 x 405	RE 20715
Chromed brass	Linen	1xE14	110/220V	25 W	IP40	245 x 405	RE 20716
Chromed brass - Gold plated	Linen	1xE14	110/220V	25 W	IP40	245 x 405	RE 20717

*On request, lampshade sand, brown and bordeaux color - E14 Entry on request.



APPLIQUE IOLANDA 30-30*



Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	300 x 488	RE 20690
Brass - color gold	Linen	1xB15d	12-24 V	20 W	IP40	300 x 488	RE 20691



APPLIQUE ISABELLA 15-12*


Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	150 x 232	RE 20692
Brass - color gold	Linen	1xB15d	12-24 V	20 W	IP40	150 x 232	RE 20693

APPLIQUE ISABELLA 15-25*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	150 x 357	RE 20694
Brass - color gold	Linen	1xB15d	12-24 V	20 W	IP40	150 x 357	RE 20695

APPLIQUE ISABELLA 15-30*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	150 x 357	RE 20696
Brass - color gold	Linen	1xB15d	12-24 V	20 W	IP40	150 x 357	RE 20697



APPLIQUE SHARON 10*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP40	142 x 122	RE 20698
Opaque aluminum	Linen	1xB15d	12-24 V	20 W	IP40	142 x 122	RE 20699

APPLIQUE SHARON 15*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP40	189 x 173	RE 20480
Opaque aluminum	Linen	1xB15d	12-24 V	20 W	IP40	189 x 173	RE 20481


APPLIQUE SHARON 20*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP40	260 x 225	RE 20700
Opaque aluminum	Linen	1xB15d	12-24 V	20 W	IP40	260 x 225	RE 20701




APPLIQUE SHEILA*

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP40	189 x 173	RE 20482
Opaque aluminum	Linen	1xB15d	12-24 V	20 W	IP40	189 x 173	RE 20483




* Lampshade: sand, brown, and bordeaux - Entry at E14.



DENISE 24-30

On request: lampshade in sand, brown or red color

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	570 x 470	RE 20718
Brass gold plated	Linen	1xB15d	12-24 V	20 W	IP40	570 x 470	RE 20719
Chromed brass	Linen	1xE14	110/220 V	25 W	IP40	570 x 470	RE 20720
Brass gold plated	Linen	1xE14	110/220 V	25 W	IP40	570 x 470	RE 20721



ISOTTA 30-30

On request: lampshade in sand, brown or red color


Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed brass	Linen	1xB15d	12-24 V	20 W	IP40	575 x 530	RE 20722
Brass gold plated	Linen	1xB15d	12-24 V	20 W	IP40	575 x 530	RE 20723
Chromed brass	Linen	1xE14	110/220 V	25 W	IP40	575 x 530	RE 20724
Brass gold plated	Linen	1xE14	110/220 V	25 W	IP40	575 x 530	RE 20725



THEODORA R - Q

Table light with cylindrical (R) or square (Q) lampshade. On request: lampshade in sand, brown or red color. Warm white light and courtesy light warm white or blue.


Bulb	Supply	Max capacity	Protection	Dimensions	Code
B15d	12 - 24 V	8 W	IP20	Ø 360 x 495 mm	RE 20782
B15d	110 - 220 Vac	8 W	IP20	Ø 360 x 495 mm	RE 20783
B15d	12 - 24 V	8 W	IP20	360 x 180 x 495 mm	RE 20784
B15d	110 - 220 Vac	8 W	IP20	360 x 180 x 495 mm	RE 20785

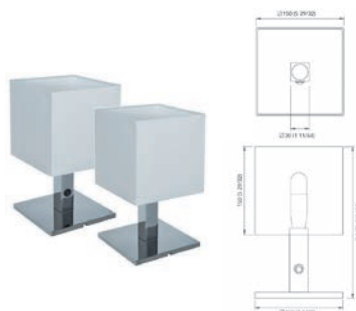

MARTINE

On request: lampshade in sand, brown or red color

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP20	140 x 259	RE 20731
Matte anodised aluminum	Linen	1xB15d	12-24 V	20 W	IP20	140 x 259	RE 20732
Chromed aluminum	Linen	1xE14	110/220 V	25 W	IP20	140 x 259	RE 20733
Matte anodised aluminum	Linen	1xE14	110/220 V	25 W	IP20	140 x 259	RE 20734

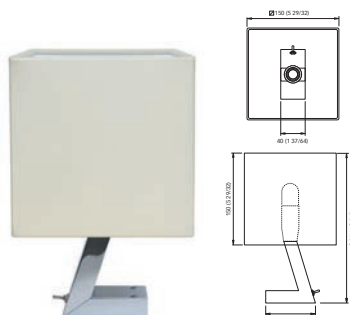

SARAH

On request: lampshade in sand, brown or red color

Base finish	Lamp shade	Bulb	Voltage	Max power	Protection	Dimensions	Code
Chromed aluminum	Linen	1xB15d	12-24 V	20 W	IP20	150 x 245	RE 20726
Matte anodized aluminum	Linen	1xB15d	12-24 V	20 W	IP20	150 x 245	RE 20727
Chromed aluminum	Linen	1xE14	110/220 V	25 W	IP20	150 x 245	RE 20728
Matte anodized aluminum	Linen	1xE14	110/220 V	25 W	IP20	150 x 245	RE 20729

AC RECESSEDED LIGHTS



SERIES AC - KOLE AC

Standard LED with natural or warm white light.

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
Ø 126 mm	Polished stainless steel	110-220 Vac	15 W	IP66	80 mm	Ø 100 mm	RE 21070
Ø 124 mm	White composite material	110-220 Vac	15 W	IP66	80 mm	Ø 100 mm	RE 21071



SERIES AC - MATHILDA AC

Standard LED with natural or warm white light.

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
117 x117 mm	Polished stainless steel	110-220 Vac	15 W	IP66	83,5 mm	Ø 100 mm	RE 21072
117 x117 mm	White composite material	110-220 Vac	15 W	IP66	80 mm	Ø 100 mm	RE 21073



SERIES AC - BYRON AC

Standard LED with natural or warm white light.

Dimensions	Finishing	Supply	Power	Protection	Recessed	Hole	Code
117 x117 mm	Polished stainless steel	110-220 Vac	15 W	IP66	83,5 mm	Ø 100 mm	RE 21074
117 x117 mm	White composite material	110-220 Vac	15 W	IP66	80 mm	Ø 100 mm	RE 21075

LINEAR LED LIGHT SYSTEM



MINI BAR SYRIA 15 VELVET

Aluminum led bar, adjustable, available in 3 lengths and 2 color temperatures. Ideal as an under-cabinet light.

Basic finish	Lamp	Voltage	Power	Protection	Dimensions	Code
Aluminum chromed	LED	10/15 V	1,5 W	IP40	150 x 24	RE 20485
Aluminum chromed	LED	20/30 V	1,5 W	IP40	150 x 24	RE 20486



MINI BAR SYRIA 28 VELVET

Basic finish	Lamp	Voltage	Power	Protection	Dimensions	Code
Aluminum chromed	LED	10/15 V	1,5 W	IP40	278 x 24	RE 20487
Aluminum chromed	LED	20/30 V	1,5 W	IP40	278 x 24	RE 20488



MINI BAR SYRIA 41 VELVET

Basic finish	Lamp	Voltage	Power	Protection	Dimensions	Code
Aluminum chromed	LED	10/15 V	1,5 W	IP40	406 x 24	RE 20489
Aluminum chromed	LED	20/30 V	1,5 W	IP40	406 x 24	RE 20490



LINDA 21 - LINDA 31

Available light: natural white or warm white.

Model	Finish	Voltage	Power	Protection	Dimensions	Code
Linda 21	White	10 - 15 Vdc	1,5 W	IP40	211 x 21 x 15	RE 20950
Linda 21	White	20 - 30V DC	1,5 W	IP40	211 x 21 x 15	RE 20951
Linda 31	White	10 - 15 Vdc	3 W	IP40	313 x 21 x 15	RE 20951
Linda 31	White	20 - 30V DC	3 W	IP40	313 x 21 x 15	RE 20952



DRESSUP

Available light: natural white or warm white. Length on request.

Finish	Voltage	Power	Protection	Dimensions	Code
Satin Aluminum	10 - 15 Vdc	4,8 W/m	IP40	Ø 60	RE 20959
Satin Aluminum	20 - 30V DC	14,4 W/m	IP40	Ø 60	RE 20960



LED STEP LIGHT EASY FIT

Elegant and timeless LED courtesy lights for a wide range of interior and exterior applications.

Lens color	LED color	Voltage	Consume	Dimensions	Inlet	Code
Transparent	White	12 - 24V DC	0,5 W	45 x 31,5	25,4 x 14	RE 20749
Transparent	Warm White	12 - 24V DC	0,5 W	45 x 31,5	25,4 x 14	RE 20750
Transparent	Blue	12 - 24V DC	0,5 W	45 x 31,5	25,4 x 14	RE 20751
Transparent	Red	12 - 24V DC	0,5 W	45 x 31,5	25,4 x 14	RE 20752



LED STEP LIGHT OBLONG

Finish	LED color	Voltage	Consume	Dimensions	Inlet	Code
316 polished stainless steel	Red	12 - 24 V	0,5 W	84 x 29	16 x 20	RE 20740
316 polished stainless steel	Blue	10 - 33 V	0,5 W	84 x 29	16 x 20	RE 20741
316 polished stainless steel	White	10 - 33 V	0,5 W	84 x 29	16 x 20	RE 20743
316 polished stainless steel	Warm white	10 - 33 V	0,5 W	84 x 29	16 x 20	RE 20744

On request mirror polished finiture.



SURFACE STRIP LAMP

Lens color	LED color	Voltage	Consume	Dimensions	Code
Transparent	Red	12 V	3 W	285 x 25 x 10	RE 20745
Transparent	Red	24 V	3 W	285 x 25 x 10	RE 20746
Transparent	Blue	12 V	3 W	285 x 25 x 10	RE 20747
Transparent	Blue	24 V	3 W	285 x 25 x 10	RE 20748
Transparent	White	12 - 24 V	3 W	285 x 25 x 10	RE 20754
Transparent	Warm white	12 - 24 V	3 W	285 x 25 x 10	RE 20755



RECESSEDED LED LAMP

Chromed steel frame

Lens color	LED color	Voltage	Consume	Dimensions	Inlet	Code
Transparent	5000° K	12V DC	2 W	250 x 50 x 28	218 x 20 x 20	RE 20970
Transparent	5000° K	24V DC	2 W	250 x 50 x 28	218 x 20 x 20	RE 20971



PRE-WIRED RECESSEDED LED LAMP WITH 2.5 M CABLE


Lens color	LED color	Voltage	Consume	Dimensions	Inlet	Code
Transparent	White	12V DC	2 W	265 x 33 x 29	218 x 20 x 25	RE 20974
Transparent	White	24V DC	2 W	265 x 33 x 29	218 x 20 x 25	RE 20975
Transparent	Red	12V DC	2 W	265 x 33 x 29	218 x 20 x 25	RE 20976
Transparent	Red	24V DC	2 W	265 x 33 x 29	218 x 20 x 25	RE 20977



DELTA CHALLENGER SERIES

CHALLENGER 30 CHALLENGER 45

Underwater LED lamp.




Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	10 - 30V DC	30 W	IP68	Ø 108	Ø 22 x 119	RE 21021
Stainless steel	Cold white	20 - 30V DC	45 W	IP68	Ø 108	Ø 22 x 119	RE 21022



DELTA CHALLENGER SERIES

CHALLENGER 60 CHALLENGER 80

Underwater LED lamp.

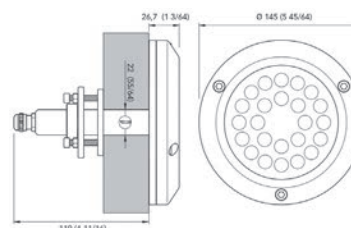


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	20 - 30V DC	60/80 W	IP68	Ø 145	Ø 22 x 119	RE 21023



CLG EVOLUTION SERIES

CLG EVOLUTION 30W CLG EVOLUTION 45W

Underwater LED lamp.

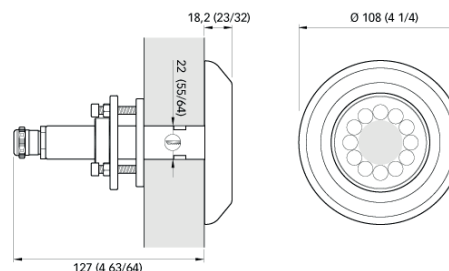


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	10 - 30 V	30 W	IP68	Ø 108	Ø 22 x 127	RE 21024
Stainless steel	Cold white	10 - 30 V	45 W	IP68	Ø 108	Ø 22 x 127	RE 21025



CLG EVOLUTION SERIES

CLG EVOLUTION 60W CLG EVOLUTION 80W

Underwater LED lamp.

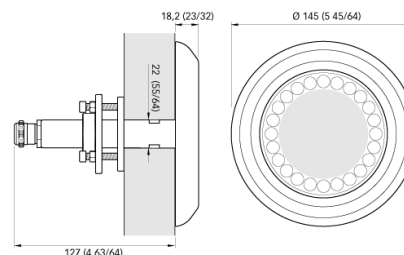


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	10 - 30 V	60 W	IP68	Ø 145	Ø 22 x 127	RE 21026
Stainless steel	Cold white	10 - 30 V	80 W	IP68	Ø 145	Ø 22 x 127	RE 21027

UNDERWATER LIGHTS LED



CLG THI 30W

LED light for underwater installations in AISI 316 stainless steel.

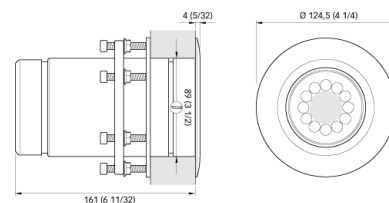


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	10 - 30 V	30 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21001
Stainless steel	Bicolor	10 - 30 V	30 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21002
Stainless steel	RGB	10 - 30 V	30 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21003



CLG THI 45W

LED light for underwater installations in AISI 316 stainless steel.

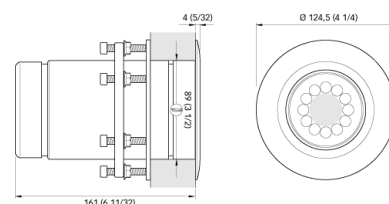


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	10 - 30 V	45 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21004
Stainless steel	Bicolor	10 - 30 V	45 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21005
Stainless steel	RGB	10 - 30 V	45 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21006



CLG THI 60W

LED light for underwater installations in AISI 316 stainless steel.

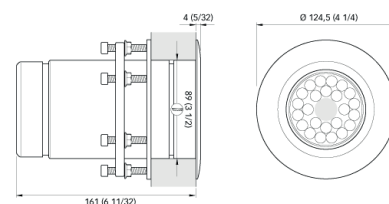


Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	20 - 30 V	60 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21007
Stainless steel	Bicolor	20 - 30 V	60 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21008
Stainless steel	RGB	20 - 30 V	60 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21009




CLG THI 80W

LED light for underwater installations in AISI 316 stainless steel.

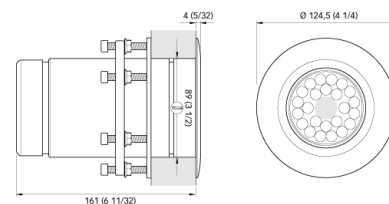

Material	LED light	Voltage	Power	Protection	Diameter	Inlet hole	Code
Stainless steel	Cold white	20 - 30 V	80 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21010
Stainless steel	Bicolor	20 - 30 V	80 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21011
Stainless steel	RGB	20 - 30 V	80 W	IP68	Ø 124,5 mm	Ø 89x161 mm	RE 21012



LED LAMP SOCKET G4

Warm light, cold light on request.

N. LED	Socket	Voltage	Power	Lumen	Color	Dimensions	Code
9	G4	8 - 35 V	1,5 W	120	Warm white	Ø 23 mm	RE 00180
12	G4	8 - 35 V	2 W	170	Warm white	Ø 30 mm	RE 00181
21	G4	8 - 35 V	3 W	270	Warm white	Ø 35 mm	RE 00186



LED LAMP SOCKET G4 DUAL

Warm light, cold light on request.

N. LED	Socket	Voltage	Power W	Lumen	Color	Dimensions	Code
9+3	G4	8 - 35 V	1,5 (2ª funzione 0,5)	140/20	Warm white/Red	Ø 30 mm	RE 00177
9+3	G4	8 - 35 V	1,5 (2ª funzione 0,5)	140/25	Warm white/Blue	Ø 30 mm	RE 00178
9+3	G4	8 - 35 V	1,5 (2ª funzione 0,5)	140/45	Warm white/Warm white	Ø 30 mm	RE 00179



LED LAMP SOCKET E14

Cold light.

Socket	Voltage	Power	Ray ill.	Dimensions	Code
E14	10 - 30V	0,7 W	360°	Ø 51 x 25,5 mm	RE 00175



FESTOON LED BULB SOCKET SV 8,5 - 8

Cold light on request.

Socket	Voltage	LED N°	LED color	Dimensions	Code
SV 8,5-8	8 - 35 V	4	Warm white	31 mm	RE 00182
SV 8,5-8	8 - 35 V	3	Warm white	37 mm	RE 00183
SV 8,5-8	8 - 35 V	3	Blue	42 mm	RE 00184
SV 8,5-8	8 - 35 V	6	Warm white	42 mm	RE 00185



LED LAMP SOCKET BA/BAY15D

Cold light.

Socket	Voltage	Power	LED N°	Dimensions	Code
BA15D	8 - 35 V	2,5 W	18	Ø 22 x 45 mm	RE 00190
BAY15D	8 - 35 V	2,5 W	18	Ø 22 x 45 mm	RE 00191



LED LAMP MR 11

Warm light and cold light.


Socket	Voltage	Power	LED N°	Dimensions	Code
MR11	8 - 35 V	2 W	1	Ø 35 x 33 mm	RE 00192




LED LAMP MR 16

Warm light and cold light.


Socket	Voltage	Power	LED N°	Dimensions	Code
MR16	8 - 35 V	5 W	4	Ø 50 x 46 mm	RE 00193

**G4 HALOGEN BULB**


Socket	Voltage	Power	Length	Diameter	Code
G4	12 V	5 W	31 mm	9 mm	RE 00114
G4	12 V	10 W	31 mm	9 mm	RE 000 61
G4	12 V	20 W	32 mm	9 mm	RE 000 62
G4	24 V	10 W	33 mm	9 mm	RE 000 82
G4	24 V	20 W	34 mm	9 mm	RE 000 83
G4	28 V	10 W	35 mm	9 mm	RE 000 84
G4	28 V	20 W	36 mm	9 mm	RE 000 85

**GY6,35 HALOGEN BULB**


Socket	Voltage	Power	Length	Diameter	Code
GY6,35	12 V	50 W	44 mm	12 mm	RE 00048
GY6,35	12 V	100 W	44 mm	12 mm	RE 00049
GY6,35	24 V	50 W	44 mm	12 mm	RE 00050
GY6,35	24 V	100 W	44 mm	12 mm	RE 00051

**GU4 DICHROIC HALOGEN BULB**


Socket	Voltage	Power	Length	Diameter	Code
GU4	12 V	20 W	38°	Ø 35 mm	RE 00036
GU4	24 V	20 W	38°	Ø 35 mm	RE 00037
GU4	24 V	35 W	38°	Ø 35 mm	RE 00115

**GU5,3 DICHROIC HALOGEN BULB**


Socket	Voltage	Power	Length	Diameter	Code
GU5,3	12 V	20 W	38°	Ø 50 mm	RE 00090
GU5,3	12 V	50 W	38°	Ø 50 mm	RE 00116
GU5,3	24 V	20 W	38°	Ø 50 mm	RE 00091
GU5,3	28 V	20 W	38°	Ø 50 mm	RE 00117
GU5,3	28 V	50 W	38°	Ø 50 mm	RE 00118

**BULB FOR SANSHIN SEARCHLIGHTS**


Socket	Voltage	Power	Length	Diameter	Code
b-plug	12 V	55 W	57	15	RE 00029
b-plug	24 V	55 W	57	15	RE 00030

**H1 HALOGEN BULB**


Socket	Voltage	Power	Length	Diameter	Code
H 1	12 V	55 W	67,5 mm	8,5 mm	RE 00119
H 1	24 V	70 W	67,5 mm	8,5 mm	RE 00120

**H2 HALOGEN BULB**

Socket	Voltage	Power	Length	Diameter	Code
H 2	12 V	55 W	67,5 mm	8,5 mm	RE 00145
H 2	24 V	70 W	31 mm	9 mm	RE 00026


**H3 HALOGEN BULB (ATTACK PK22S)**

Socket	Voltage	Power	Length	Diameter	Code
PK22S	12 V	55 W	42 mm	11,5 mm	RE 00019
PK22S	24 V	70 W	42 mm	11,5 mm	RE 00020




BAY15D DOUBLE POLE BULB, VERTICAL FILAMENT

Socket	Voltage	Power	Length	Diameter	Code
BAY15D	12 V	25 W	62 mm	36 mm	RE 00092
BAY15D	24 V	25 W	62 mm	36 mm	RE 00093
BAY15D	12 V	10 W	62 mm	36 mm	RE 00094
BAY15D	24 V	10 W	62 mm	36 mm	RE 00095



BAY15D LONG LIFE BULB

Socket	Voltage	Power	Length	Diameter	Code
BAY15D	12 V	25 W	70 mm	26 mm	RE 00042
BAY15D	24 V	25 W	70 mm	26 mm	RE 00043
BAY15D	12 V	10 W	70 mm	26 mm	RE 00044
BAY15D	24 V	10 W	70 mm	26 mm	RE 00045



LONG LIFE BULB P28S ATTACK

Socket	Voltage	Power	Length	Diameter	Code
P28S	24 V	40 W	108 mm	38 mm	RE 00123
P28S	220 V	65 W	108 mm	38 mm	RE 00124



BULB FOR DHR SEARCHLIGHTS

Voltage	Power	Diameter	Projector fixing	Maximum range	Code
10-32V DC	10 W	Ø 150 mm	3 x 7 mm	447 mt	RE 58810/B



DIXPLAY BA15D 45MM 18SMD



Socket	Voltage	Power	N° LED	Color	Dimensions	Code
BA15D	8 - 35 V	2,5 W	18	Warm white	Ø 22 x 45 mm	RE 00190
BA15D	8 - 35 V	2,5 W	18	Cold white	Ø 22 x 45 mm	RE 00194

DIXPLAY BAY15D 45MM 18SMD

Socket	Voltage	Power	N° LED	Color	Dimensions	Code
BAY15D	8 - 35 V	2,5 W	18	Warm white	Ø 22 x 45 mm	RE 00191
BAY15D	8 - 35 V	2,5 W	18	Cold white	Ø 22 x 45 mm	RE 00195
BAY15D	8 - 35 V	2,5 W	18	Red	Ø 22 x 45 mm	RE 00196
BAY15D	8 - 35 V	2,5 W	18	Green	Ø 22 x 45 mm	RE 00197



DIXPLAY BA15D 33SMD

Socket	Voltage	Power	N° LED	Color	Dimensions	Code
BA15D	8 - 35 V	3 W	33	Cold white	Ø 22 x 68 mm	RE 00198
BAY15D	8 - 35 V	3 W	33	Warm white	Ø 22 x 68 mm	RE 00199




E14 SPHERICAL LED BULB

Socket	Voltage	Power	Length	Diameter	Code
E14 - 3000° K	24 V	5W	82 mm	45 mm	RE 00156
E14 - 4000° K	24 V	5W	82 mm	45 mm	RE 00157
E14 - 6000° K	24 V	5W	82 mm	45 mm	RE 00158




E27 SPHERICAL LED BULB

Socket	Voltage	Power	Length	Diameter	Code
E27 - 3000° K	24 V	5 W	82 mm	45 mm	RE 00165
E27 - 4000° K	24 V	5 W	82 mm	45 mm	RE 00166
E27 - 6000° K	24 V	5 W	82 mm	45 mm	RE 00167

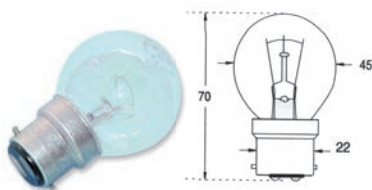


B22 SPHERICAL LED BULB

Socket	Voltage	Power	Length	Diameter	Code
B22	12 V	15 W	70 mm	45 mm	RE 00131
B22	14 V	25 W	70 mm	45 mm	RE 00132
B22	12 V	40 W	70 mm	45 mm	RE 00133
B22	24 V	40 W	70 mm	45 mm	RE 00135
B22	24 V	60 W	70 mm	45 mm	RE 00136




WEDGE GLASS BASE W2X4,6D

Socket	Voltage	Power	Length	Diameter	Code
W2X4,6D	12 V	1,2 W	18 mm	5 mm	RE 00052
W2X4,6D	24 V	1,2 W	31 mm	5 mm	RE 00053



WEDGE GLASS BASE W2,1X9,5D

Socket	Voltage	Power	Length	Diameter	Code
W2,1X9,5D	12 V	3 W	25,30 mm	10,3 mm	RE 00001
W2,1X9,5D	24 V	3 W	25,30 mm	10,3 mm	RE 00002

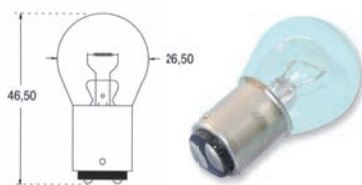


BA15D DOUBLE POLE BULB

Socket	Voltage	Power	Length	Diameter	Code
BA15D	12 V	15 W	46,5 mm	26,50 mm	RE 00005
BA15D	24 V	15 W	46,5 mm	26,50 mm	RE 00006
BA15D	12 V	20 W	46,5 mm	26,50 mm	RE 00046
BA15D	24 V	20 W	46,5 mm	26,50 mm	RE 00047




DIXPLAY BA15D 12(S)+4(T) 16SMD

Socket	Voltage	Power	N. LED	Color	Dimensions	Code
BA15D	12 V	0,7 W	12 side + 4 top	Cold white	Ø 25,5 x 51mm	RE 00129
BA15D	12 V	0,7 W	12 side + 4 top	Warm white	Ø 25,5 x 51mm	RE 00130




SV 7,8 FESTOON BULB

Socket	Voltage	Power	Length	Diameter	Code
SV 7,8	12 V	3 W	31 mm	8 mm	RE 00054
SV 7,8	24 V	3 W	31 mm	8 mm	RE 00055




SV 8,5-8 FESTOON BULB

Socket	Voltage	Power	Length	Diameter	Code
SV 8,5-8	12 V	5 W	38 mm	10 mm	RE 00023
SV 8,5-8	12 V	10 W	38 mm	10 mm	RE 00017
SV 8,5-8	24 V	5 W	38 mm	10 mm	RE 00024
SV 8,5-8	24 V	10 W	38 mm	10 mm	RE 00018




SV 8,5-8 FESTOON BULB

Socket	Voltage	Power	Length	Diameter	Code
SV 8,5-8	12 V	10 W	43 mm	11 mm	RE 00027
SV 8,5-8	24 V	10 W	43 mm	11 mm	RE 00028




SV 8,5-8 FESTOON BULB

Socket	Voltage	Power	Length	Diameter	Code
SV 8,5-8	12 V	15 W	43 mm	15 mm	RE 00015
SV 8,5-8	12 V	18 W	43 mm	15 mm	RE 00013
SV 8,5-8	24 V	10 W	43 mm	15 mm	RE 00016
SV 8,5-8	24 V	18 W	43 mm	15 mm	RE 00014




T 5,5K INCANDESCENT BULB

Socket	Voltage	Power	Length	Diameter	Code
T 5,5K	12 V	1,2 W	22 mm	4,8 mm	RE 00031
T 5,5K	24 V	1,2 W	22 mm	4,8 mm	RE 00032
T 5,5K	30 V	1,2 W	22 mm	4,8 mm	RE 00033




BA7S BULB

Socket	Voltage	Power	Length	Diameter	Code
BA7S	12 V	2 W	20,7 mm	6,8 mm	RE 00038
BA7S	24 V	2 W	20,7 mm	6,8 mm	RE 00039




BA9S MICROSVAN BULB

Socket	Voltage	Power	Length	Diameter	Code
BA9S	12 V	2 W	23 mm	8,5 mm	RE 00141
BA9S	12 V	4 W	23 mm	8,5 mm	RE 00011
BA9S	24 V	2 W	23 mm	8,5 mm	RE 00142
BA9S	24 V	4 W	23 mm	8,5 mm	RE 00012



BA15D DOUBLE POLE SVAN BULB

Socket	Voltage	Power	Length	Diameter	Code
BA15D	12 V	5 W	37,5 mm	19 mm	RE 00003
BA15D	24 V	5 W	37,5 mm	19 mm	RE 00004



BA15S ONE POLE BULB

Socket	Voltage	Power	Length	Diameter	Code
BA15S	12 V	5 W	37,5 mm	19 mm	RE 00034
BA15S	24 V	5 W	37,5 mm	19 mm	RE 00035
BA15S	12 V	10 W	37,5 mm	19 mm	RE 00040
BA15S	24 V	10 W	37,5 mm	19 mm	RE 00041

**LAMPHOLDER FOR G4-GY6, 35 BULBS**

Mica insulation body. Nickel contacts.
Pre-wired with 32,5cm cable.

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
G4 - GY6,35	9	17	300° C	50 V	RE 00089

**DIXPLAY G4 LAMP CONVERTER FROM BA15S**

Bulb connections	Thickness mm	Dimensions mm	Voltage supply	Waterproof	Code
G4 converter	-	Ø19mm x 29	8 - 35V	No	RE 00146

**LAMPHOLDER FOR BA15D BULBS**

Galvanized steel body. Screw terminals.

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
BA15d	27,5	31	165° C	250 V	RE 00078

**LAMPHOLDER FOR BA15D BULBS**

Galvanized steel body. Screw terminals.

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
BA15d	36	23	165° C	250 V	RE 00088/M

**LAMPHOLDER FOR B22D BULBS**

Body in brass with inserts in porcelain. Steel contacts.

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
B22	44	30	165° C	250 V	RE 00143

**LAMPHOLDER FOR BAY15D BULBS**

Stainless steel body. Base completely insulated in porcelain.

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
BAY15D	-	-	165° C	250 V	RE 00088/B

**LAMPHOLDER FOR E27 BULBS**

Body in brass realized in three parts

Bulb connections	Thickness mm	Diameter mm	Temperature max	Voltage max	Code
E27	55	40	230° C	250 V	RE 00144


**DIXPLAY G4 TO E27 LAMP CONVERTER**

Bulb connections	Thickness mm	Dimensions mm	Voltage supply	Waterproof	Code
G4 converter	-	Ø 32x 37	-	No	RE 00145



DIGITAL DIMMER WITH ELECTRONIC CONTROL

It can be used as a dimmer for Strip Le IP65
It can memorize its status before the switch - off
Designed for dimmer from 0 to 100% the input supply.



Voltage	MAX power	Length	Height	Temp.	Code
9 - 16V DC	6 A	82,55 mm	88,9 mm	-40° +85°	RE 20133
9 - 16V DC	12 A	82,55 mm	88,9 mm	-40° +85°	RE 20134
9 - 16V DC	25 A	82,55 mm	88,9 mm	-40° +85°	RE 20164
18 - 32V DC	6 A	82,55 mm	88,9 mm	-40° +85°	RE 20135
18 - 32V DC	12 A	82,55 mm	88,9 mm	-40° +85°	RE 20136



MODULAR DIMMER 12V-24V

Switch-off state memory. Easy electric system: two buttons only.
Features: micro-controller system.
Internal protection of the circuit breaker - thermal protection.
LED installed - radio noises free. Stop at 100% and stop at 15%.
Switch-off state memory. Not suitable for fluorescent bulbs.



Voltage	MAX power	Length	Height	Depth	Code
12 - 24V	350-150 W	52 mm	88 mm	70 mm	RE 20175



DIMMER HDMI 300 PLUS

Dimmer for control of white LED and halogen spotlights



Model	Supply	MAX Power	Dimensions mm	Control	Fusibile	Code
Master	10-30V DC	150W a 12V - 300W a 24V	88x58x52	button	15 A	RE 20173
Slave	10-30V DC	150W a 12V - 300W a 24V	88x58x52	Master controlled	15 A	RE 20174



DIMMER ZDIM100



Supply V	Max charge	Fuse	Control Mode	Dimensions mm	Code
12/24	100 W	8 A	button	80 x 30 x 56	RE 20757



LDIM BUS 2CH

Dimmer for the lights control and LED Strip. It equipped with two channels.



Supply	Max charge	Fuse	Control Mode	Dimensions mm	Code
10 - 30V DC	50 W a 12V - 100 W a 24 V	8 A	button	53 x 63 x 90	RE 20753




LDIM BUS RGBW

Dimmer for the lights control and Strip White LED and RGB LED Strip.



Supply	Max charge	Fuse	Control Mode	Dimensions mm	Code
10 - 30V DC	75 W a 12V - 150 W a 24 V	8 A	button	105 x 63 x 107	RE 20756

DIMMER AND ELECTRONIC BALLAST



QUICK COLOR CONTROL RGBW SYSTEM COLOR CONTROLLER QCC-LCS TP

Control device for Quick RGBW lights.

Power supply: 10-30V DC - 30mA

Output: DMX512 command signal

Dimensions: 86x86x35,6mm



RE 20176



QUICK COLOR CONTROL RGBW SYSTEM COLOR CONTROLLER QCC-LCS TS WIFI

To allow the control by mobile devices through the Quick Color Control App

Power supply: 10 - 30V DC

Output: DMX control signal

Power consumption: 60mA @ 24V DC

Dimensions: 88,5x122x14mm



RE 20180



QUICK COLOR CONTROL QCC-PLT 300

Quick RGBW system management device

Alimentation: 10-30V DC - 150W@12V - 300W@24V Input: DMX512 or push-buttons

Output: control signal for QCC-DRV CH4

Short circuit, overheating, overload and voltage spikes protection

Dimensions: 87,5x58x112mm



RE 20178



QUICK COLOR CONTROL QCC-DRV CH4

RGBW downlights driver

Input: control signal for QCC-PLT 300. Output: 350mA max constant current for each Color, to drive the QCC RGBW downlights. Short circuit, overheating, overload and voltage spikes protection. Dimensions: 66,5x59x27,4mm



RE 20179



QUICK COLOR CONTROL QCC-DRV 4CV RGBW


Driver for RGBW linear lights.

Input: control signal for QCC-PLT 300.

Output: constant voltage max 2.5A to drive QCC RGBW linear lights

Short circuit, overheating, overload and voltage spikes protection.

RE 20181

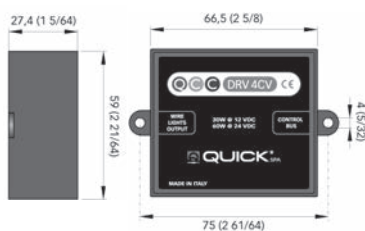

QUICK COLOR CONTROL QCC-DRV TW CV

Dynamic white linear light driver.

Input: control signal for QCC-PLT 300.

Output: constant voltage max 2.5A to drive QCC TW linear lights.

RE 20182

QUICK COLOR CONTROL QCC-DRV 1CV MONO

Driver for linear lights and single-color spotlights.

Input: control signal for QCC-PLT 300.

Output: constant voltage max 2.5A to drive linear lights and single-color spotlights.

RE 20183



DC/AC CONVERTER

Electronic ballast for neon lamp. High reliability

Protection against input reverse polarity and overcharge

Low consumption. Dimmerable



Model	Input supply	Power MAX	Fluorescent bulb power	Bulb N°	Rapid clutch	Dimensions mm	Code
Electronic ballast 13W	24 V	13 W	1 x 13 W	1	screw	42 x 168 x 28	RE 20171
Electronic ballast 36W	24 V	36 W	1 x 36 W / 1 x 18 W	1	screw	42 x 168 x 28	RE 20167
Electronic ballast 40W	24 V	40 W	1 x 36 W / 2 x 18 W	1 o 2	screw	67 x 287 x 39	RE 20170
Electronic ballast 80W	24 V	80 W	1 x 36 W / 2 x 36 W	1 o 2	screw	67 x 287 x 39	RE 20168

SIMPLY 465 - SIMPLY 920

Available light: natural white or warm white - Dimmable.



Model	Finish	Voltage	Power	Protection	Dimensions	Code
Simply 465	White 9010	10 - 15V DC	14,4 W/m	IP40	465x18x11	RE 20954
Simply 465	White 9010	20 - 30V DC	14,4 W/m	IP40	465x18x11	RE 20955
Simply 920	White 9010	10 - 15V DC	14,4 W/m	IP40	920x18x11	RE 20956
Simply 920	White 9010	20 - 30V DC	14,4 W/m	IP40	920x18x11	RE 20957

INFINITY


Aluminum led bar with rigid opal polycarbonate protection that allows the light to be spread evenly.



Finish	Voltage	Power	Protection	Dimensions	Code
Satin aluminum	24V DC	8 W/m	IP40	10x15	RE 20949

MAXI BAR

Fully Recessed bar, available in natural white and warm white
Length on request.

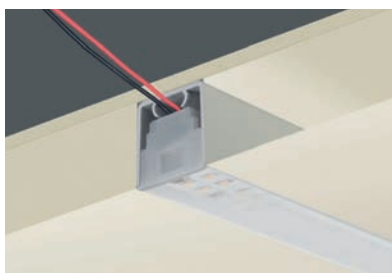

Finish	Voltage	Power	Protection	Dimensions	Code
Opaline	20 - 30V DC	18 W/m	IP66	30x31,5	RE 20958

STARRY SKIES


Fiber optic lighting, white/RGB.




Model	Voltage	Color	Consump.	Fiber N°	Protection	Length	Code
SSW1	10 - 30V DC	White	3 W	60	IP65	2,5 m	RE 20961
SSW2	10 - 30V DC	White	3 W	60 + 60	IP65	2,5 + 4 m	RE 20962
SSC1	10 - 15V DC	RGB	3 W	60	IP65	2,5 m	RE 20963
SSC1	20 - 30V DC	RGB	3 W	60	IP65	2,5 m	RE 20964
SSC2	10 - 15V DC	RGB	3 W	60 + 60	IP65	2,5 + 4 m	RE 20965
SSC2	20 - 30V DC	RGB	3 W	60 + 60	IP65	2,5 + 4 m	RE 20966

ONDALED

OndaLED is an innovative product suitable to both light up and decorate, especially outdoor considering its IP67 rate. It's an highly flexible silicon bar which irradiates through a resinated surface.

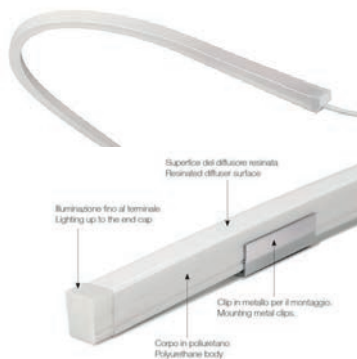

Finish	Voltage	Power	Protection	Dimensions	Code
Opaline	10 - 15/20 - 30V DC	10 W/m	IP67	Up to 603 cm	RE 20967

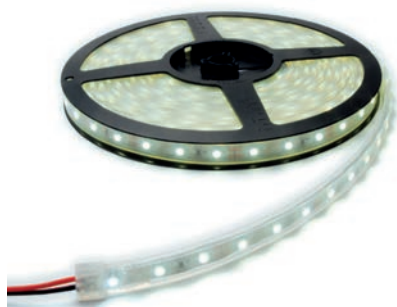

STRIP LED

Color	Supply V	Consume W/m	Consume A/m	Lenght cable m	Code
White	10 - 15	4,8	0,6	5	RE 20764
White	20 -30	4,8	0,3	5	RE 20765
Warm white	10 - 15	4,8	0,6	5	RE 20766
Warm white	20 - 30	4,8	0,3	5	RE 20767
Red	20 - 30	4,8	0,3	5	RE 20768
Blue	20 - 30	4,8	0,3	5	RE 20769



STRIP LED - HP

Waterproof LED strip (IP65) high UV resistance
Length on request


Color	Supply V	Power W/m a 24 V	Luminous flux lm	Dimensions mm	Code
Natural white	20 - 30	12	570	4 x 12	RE 20995
Warm white	20 - 30	12	500	4 x 12	RE 20996



STRIP LED - HP PLUS

Waterproof LED strip (IP65) high UV resistance
Length on request

Color	Supply V	Power W/m a 24 V	Luminous flux lm	Dimensions mm	Code
Natural white	20 - 30	10	620	4 x 12	RE 20997
Warm white	20 - 30	10	540	4 x 12	RE 20998

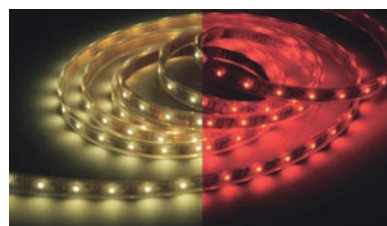

STRIP LED - WR

Waterproof LED strip (IP65) high UV resistance
Length on request

Supply V	Power W/m a 24 V	Luminous flux lm	Dimensions mm	Code
20 - 30	2,6	140	4 x 14,5	RE 20978



STRIP LED - RGBW

Waterproof LED strip (IP65) high UV resistance
Length on request
Color: RGB + white

Supply V	Power W/m a 24 V	Luminous flux lm	Dimensions mm	Code
20 - 30	11	410	4 x 14,5	RE 20979



AC-DC LED DRIVER

Quick Marine Lighting has selected a series of devices to meet the needs of any type of power supply on board boats with LED drivers, AC-DC DIN rail power supplies, and DC-AC converters.

Model	Input voltage	Output voltage	Output current	Power	Protection class	Dimensions mm	Code
PSCV 4W	100 - 240V AC	24 V	0,17 A max	4 W	IP65	38x27x21	RE 20770
PSCV 10W	220 - 240V AC	24 V	0,41 A max	10 W	IP20	61,6x39x22,2	RE 20771
PSCV 15W	220 - 240V AC	24 V	0,7 A max	15 W	IP20	111,2x39x22,2	RE 20772
PSCV 30W	220 - 240V AC	24 V	1,2 A max	30 W	IP20	111,2x39x22,2	RE 20773
PSCV 60W	220 - 240V AC	24 V	2,5 A max	60 W	IP20	125x82x29	RE 20774
PSCV 150W	220 - 240V AC	24 V	6,25 A max	150 W	IP20	280x40,2x29	RE 20775



AC-DC POWER SUPPLIES PS 45

Protections: overheating, overvoltage and overcharge
On request only.

Input voltage	Output voltage	Max charge	Max charge A	Installation	Dimensions mm	Code
85 - 264 Vac	24V DC	45 W	2 A	DIN EN 50.022 bar	93 x 78 x 67	RE 20758



AC-DC POWER SUPPLIES PS 60

Protections: overheating, overvoltage and overcharge.

Input voltage	Output voltage	Max charge	Max charge A	Installation	Dimensions mm	Code
85 - 264 Vac	24V DC	60 W	2,5 A	DIN EN 50.022 Bar	78 x 93 x 56	RE 20759



AC-DC POWER SUPPLIES PS 240

Protections: overheating, overvoltage and overcharge
On request only.

Input voltage	Output voltage	Max charge	Max charge A	Installation	Dimensions mm	Code
85 - 264 Vac	24V DC	240 W	10 A	DIN EN 50.022 Bar	125 x 125 x 100	RE 20760



DC-DC CONVERTER

DC/DC converter with overvoltage and overload protection.

Input voltage	Output voltage	Power W	Dimensions mm	Code
19 - 36V DC	24V DC	50	159 x 98 x 38	RE 20761
19 - 36V DC	24V DC	100	199 x 98 x 38	RE 20762
19 - 36V DC	24V DC	150	199 x 110 x 50	RE 20763