



TECMA

GIANNESCHI
pumps and bowers

aber
marine

indel
Webasto
Marine

JABSCO

Quick

PLANUS

- Refrigerators
- Freezer
- Cooling units
- Water heaters
- Toilets
- Sanisplits
- Bidet
- Macerators
- Waste tanks
- Faucets
- Showers
- Solenoid valves

TELESCOPIC GANGWAYS



EXO

Hydraulic gangway, telescopic with AISI 316 tubular steel structure at circular section. The stanchions that open out automatically are interchangeable, left/right. Footboards in Burma Teak. Hydraulic box with electrovalves. Polished structure. Control panel on the wall. Remote control included. Functions as a davit and can rotate for operations with the tender. For an easy installation, the piston can be mounted in eight different inclinations.



EXO

| Model | Length closing | Max extension | Power | Max capacity | Weight Kg | Code |
|--------|----------------|---------------|-------|--------------|-----------|----------|
| EXO-20 | 1208 mm | 2000 mm | 12 V | 200 Kg | 60 Kg | RE 98001 |
| EXO-23 | 1363 mm | 2300 mm | 12 V | 200 Kg | 64 Kg | RE 98002 |
| EXO-27 | 1578 mm | 2700 mm | 12 V | 200 Kg | 71 Kg | RE 98003 |
| EXO-30 | 1735 mm | 3000 mm | 12 V | 150 Kg | 75 Kg | RE 98004 |
| EXO-20 | 1208 mm | 2000 mm | 24 V | 200 Kg | 60 Kg | RE 98005 |
| EXO-23 | 1363 mm | 2300 mm | 24 V | 200 Kg | 64 Kg | RE 98006 |
| EXO-27 | 1578 mm | 2700 mm | 24 V | 200 Kg | 71 Kg | RE 98007 |
| EXO-30 | 1735 mm | 3000 mm | 24 V | 150 Kg | 75 Kg | RE 98008 |

Remote control

RE 98000



ICE MAKER

In stainless steel
Fully automatic (internal 4lt tank)
It can be connected to an external supply for a better range
Spray system for perfect ice cubes
Cooling unit R404A (0.140 Kg)
CE-IMQ Certifications

ICEDRINK WHITE LOW PROFILE



| Model | Volume | Voltage | Absorption | Dimensions mm | Weight | Code |
|----------------------------|--------|---------|------------|---------------|--------|----------|
| ICEDRINK CLEAR | 4 lt | 230 Vac | 320 W | 584x355x430 | 29 Kg | RE 88053 |
| ICEDRINK WHITE/WHITE DOOR | 12 lt | 230 Vac | 180 W | 630x355x420 | 26 Kg | RE 88014 |
| ICEDRINK WHITE INOX | 12 lt | 230 Vac | 180 W | 630x375x460 | 27 Kg | RE 88015 |
| ICEDRINK WHITE LOW PROFILE | 12 lt | 230 Vac | 180 W | 475x370x630 | 26 Kg | RE 88017 |



“DIVINO” WINE CELLAR

Resistant metal structure
No need of ventilation grills
Maximum capacity obtained by removing the wooden bars
Double closing system
Compressor CFC free
Internal Light

| Model | Supply range V | Bottles capacity N° | Wooden bars | Dimensions HxWxD mm | Weight Kg | Temperature | Code |
|-------|----------------|---------------------|-------------|---------------------|-----------|-------------|----------|
| WC 23 | 230 | 27 | 3 | 462 x 588 x 538 | 30,5 | mono | RE 88006 |
| WC 35 | 230 | 45 | 5 | 715 x 588 x 544 | 32,5 | mono | RE 88008 |

TRAVEL BOX REFRIGERATORS



TB 13

TB 18

TRAVEL BOX REFRIGERATOR ISOTHERM

Isotherm travel boxes offer great capacities to store food and drinks on board. Their compact and light design helps to optimise space on board.

| Model | Volume liter | Dimensions mm | Weight kg | Supply V | Consump. (24h) | Operating temperature °C | Energy class | Code |
|-------|--------------|---------------|-----------|-----------|----------------|--------------------------|--------------|----------|
| TB 13 | 13 | 360x225x535 | 8,5 | 12/24 Vdc | 150 | from +10 to -18 | A+ | RE 88022 |
| TB 18 | 18 | 405x235x565 | 9 | 12/24 Vdc | 150 | from +10 to -18 | A+++ | RE 88023 |



BI 36

BI 30

BI 16

BUILT IN FREEZER

The BI refrigerators models box equipped with the space saving Secop BD 1.4F Micro compressor solution. The upper lids with inner recess allows big bottle storage. Temperature range from 0°C to +10°C. They combines great usability to high development standards, thanks to they easy to use digital display and to a "splash proof" IPX5 front protection.

| Model | Volume liter | Dimensions mm | Supply V | Consump. (24h) | Operating temperature °C | Code |
|-------|--------------|---------------|----------|----------------|--------------------------|----------|
| BI16 | 16 | 557x384x240 | 12/24 | 155 | from 0° to +10° | RE 88058 |
| BI30 | 30 | 724x448x251 | 12/24 | 265 | from 0° to +10° | RE 88059 |
| BI36 | 36 | 685x438x240 | 12/24 | 290 | from 0° to +10° | RE 88060 |

BUILT IN REFRIGERATOR BI 29 DUAL

Indel Webasto Marine Built-In boxes allow an optimised use of space on board thanks to the top-loading access to the interior. They are extremely flexible in size and design.

| Model | Voltage supply V | Internal volume lt | Dimensions (HxWxD) mm | Weight Kg | Operating temperature °C | Max energy consumption (24h) | Code |
|-------|------------------|--------------------|-----------------------|-----------|--------------------------|------------------------------|----------|
| BI 29 | 12 - 24 | 29 | 370x342x505 | 18 | from +10 to -12 | 250 W | RE 88029 |



BUILT IN REFRIGERATOR BI 41 DUAL

Stainless steel inner liner, plastic bottom section
One wire basket removable
One insulation with rubber seal for the lid
Fan cooled compressor mounting below
Easily repositioned up to 1,5 m away

| Model | Voltage supply V | Volume lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption (24h) | Code |
|---------|------------------|-----------|-----------------------|-----------|----------------|-----------------------------|----------|
| BI - 41 | 12 - 24 | 41 | 610 x 497 x 342 | 19 | + 10° - 10° | 270 W | RE 88002 |



BUILT IN REFRIGERATOR BI 40

Compact and efficient refrigerator
Fan cooled side mounted compressor unit is easily repositioned up to 1,5 m away
One insulation with rubber seal for the lid

| Model | Voltage supply V | Volume lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption (24h) | Code |
|---------|------------------|-----------|-----------------------|-----------|----------------|-----------------------------|----------|
| BI - 40 | 12 - 24 | 40 | 400 x 395 x 560 | 16 | +10° - 2° | 270 W | RE 88024 |



BUILT IN REFRIGERATORS



BUILT IN REFRIGERATOR BI 53 F

Internal coating in steel, bottom in plastic. Removable internal basket
Compressor fixed inside the bottom of the structure
Eventually removable up to 1,5 meters

| Model | Voltage supply V | Internal volume lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|---------|------------------|--------------------|-----------------------|-----------|----------------|-----------------------|----------|
| BI 53 F | 12 - 24 | 53 | 630 x 425 x 645 | 26 | 0° - 20° | 260 W | RE 88035 |



BUILT IN REFRIGERATOR BI 75

Internal coating in steel, bottom in plastic. Two removable internal baskets
Compressor fixed inside the bottom of the structure
Eventually removable up to 1,5 meters

| Model | Voltage supply V | Internal volume lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|-------|------------------|--------------------|-----------------------|-----------|----------------|-----------------------|----------|
| BI 75 | 12 - 24 | 75 | 630 x 425 x 645 | 26 | +15° - 20° | 340 W | RE 88037 |



BUILT IN REFRIGERATOR BI 92 DUAL

Internal coating in steel, bottom in plastic. Three removable internal baskets
Compressor fixed inside the bottom of the structure
Eventually removable up to 1,5 meters

| Model | Voltage supply V | Internal volume lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|------------|------------------|--------------------|-----------------------|-----------|----------------|-----------------------|----------|
| BI 92 DUAL | 12 - 24 | 92 | 615 x 480 x 801 | 28 | +10° - 20° | 360 W | RE 88038 |



BUILT IN REFRIGERATOR BI 172 DUAL

The Built-In 172 DUAL is a combined cooling solution 130 liter fridge & 38 liter freezer or 172 liter fridge only, capable to work on a multiple use base.

It is a fridge/freezer or a fridge only device to be nicely integrated into a furniture assembly.

The innovative concept at the base of the BI172 product development is modularity both in use and in application. It is possible to change the product's functions according to the customer needs, since it has been specified to cover all market/customer requirements.

| Model | Voltage supply V | Internal volume lt | Dimensions (HxWxD) mm | Weight Kg | Max power consumption | Code |
|-------------|----------------------|--|-----------------------|-----------|-----------------------|----------|
| BI 172 DUAL | 12/24 Vdc 220 Vac | 172l only refrigerator 130l refrigerator + 38l freezer | 840x1015x560 | 45 | 603 W | RE 88030 |



CRUISE REFRIGERATORS

DESIGNED FOR NAUTICAL APPLICATION:

Operate noiselessly, be thoroughly reliable and consume a minimum battery power Grey door panels. Door with a safety lock and magnetic rubber seal.

Fan cooled 12/24 Volt danfoss compressor.

The compressor unit is easily removed and can be mounted in any vertical position up to 1,5 m.


Provided with a manual thermostat.

Temperature is adjusted by a thermostat which also has an on- off switch.

System 12V: sensor turns off at 10V (it starts at 12V).

System 24V: sensor turns off at 21V (it starts at 24V).

Panel door: standard grey (on request is available white, teak, mahogany, cherry).



DRAWER REFRIGERATOR CRUISE CLASSIC

Ideal for being installed in small places

Compressor can be moved up to 1 meters

| Model | Voltage supply V | Total volume | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|-----------|------------------|--------------|-------------------|-----------------------|-----------|----------------|-----------------------|----------|
| Cruise 36 | 12 - 24 | 36 lt | - | 250 x 440 x 715 | 16 | +5° - 6° | 300 W | RE 88001 |

| Model | Voltage supply V | Total volume | Volume freezer | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|-----------|------------------|--------------|----------------|-----------------------|-----------|----------------|-----------------------|----------|
| Cruise 42 | 12 - 24 | 42 lt | 5 lt | 525 x 380 x 515(310) | 16 | + 5° - 6° | 2,7 A | RE 88003 |
| Cruise 49 | 12 - 24 | 49 lt | 5 lt | 525 x 386 x 450 | 17 | + 5° - 6° | 2,7 A | RE 88096 |
| Cruise 65 | 12 - 24 | 65 lt | 5 lt | 530 x 450 x 480 | 18 | + 5° - 6° | 2,7 A | RE 88097 |
| Cruise 85 | 12 - 24 | 85 lt | 8 lt | 625 x 475 x 515 | 23 | + 5° - 6° | 4 A | RE 88098 |

| Model | Voltage supply V | Total volume | Volume freezer | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|------------|------------------|--------------|----------------|-----------------------|-----------|----------------|-----------------------|----------|
| Cruise 90 | 12 - 24 | 70 lt | 20 lt | 845 x 475 x 425 | 25 | - | 5 A | RE 88104 |
| Cruise 100 | 12 - 24 | 100 lt | 6 lt | 745 x 485 x 455 | 26 | + 5° - 6° | 4 A | RE 88099 |
| Cruise 130 | 12 - 24 | 130 lt | 8 lt | 745 x 525 x 505 | 27 | + 5° - 6° | 5 A | RE 88100 |

REFRIGERATOR/FREEZER CRUISE SILVER COMBI

Refrigerator and Freezer combo, with independent doors

Internal light

| Model | Voltage supply V | Total volume | Volume freezer | Dimensions (HxWxD) mm | Weight Kg | Temperature °C | Max power consumption | Code |
|------------|------------------|--------------|----------------|-----------------------|-----------|----------------|-----------------------|----------|
| Cruise 155 | 12 - 24 | 110 lt | 45 lt | 1220 x 480 x 460 | 37 | -18° | 512 W | RE 88105 |
| Cruise 195 | 12 - 24 | 130 lt | 65 lt | 1345 x 545 x 580 | 60 | -18° | 6,2 A | RE 88106 |
| Cruise 225 | 12 - 24 | 183 lt | 42 lt | 1545 x 595 x 560 | 44 | -18° | 6 A | RE 88107 |
| Cruise 260 | 12 - 24 | 238 lt | 42 lt | 1700 x 566 x 491 | 50 | -18° | 620 W | RE 88108 |

STAINLESS STEEL REFRIGERATORS

DESIGNED FOR NAUTICAL APPLICATION: Operate noiselessly, consume a minimum battery power
Stainless steel door totally flush with an integrated door latch
In the front and also interior details have stainless steel trims



CRUISE 36 STEEL REFRIGERATORS

Same as CR36 but in Stainless Steel
Ideal solution when small spaces are available
Compressor can be moved up to 1 m

| Model | Voltage supply V | Volume total lt | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Temp. °C | Max power consump. | Code |
|------------------|------------------|-----------------|-------------------|-----------------------|-----------|----------|--------------------|----------|
| Cruise 36 Steel | 12 - 24 | 36 | - | 250x455x715 | 16 | +5° - 6° | 2,7 A | RE 88010 |
| Cruise 130 Drink | 12 - 24 | 130 | - | 560x545x750 | 28 | +5° - 6° | 400 W (24h) | RE 88061 |
| Cruise 160 Drink | 12 - 24 | 160 | - | 610x626x870 | 40 | +5° - 6° | 512 W (24h) | RE 88062 |



STAINLESS STEEL REFRIGERATORS COMBI

Double door. Refrigerator + Freezer

| Model | Voltage supply V | Volume total lt | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Temp. °C | Max power consump. | Code |
|------------------|------------------|-----------------|-------------------|-----------------------|-----------|-----------|--------------------|----------|
| Cruise 195 Steel | 12 - 24 | 130 | 65 | 1345x545x580 | 51 | +5° - 18° | 6 A | RE 88051 |
| Cruise 200 Steel | 12 - 24 | 150 | 50 | 868x730x690 | 53 | -21° | 6 A | RE 88054 |
| Cruise 220 Steel | 12 - 24 | 130 | 90 | 1545x545x560 | 59 | - | 6 A | RE 88032 |
| Cruise 260 Steel | 12 - 24 | 130 | 130 | 1545x545x560 | 64 | - | 6 A | RE 88033 |
| Cruise 320 Steel | 12 - 24 | 160 | 160 | 1790x628x610 | 85 | - | 6 A | RE 88034 |



STAINLESS STEEL REFRIGERATORS CLEAN TOUCH

| Model | Voltage supply V | Volume total lt | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Temp. °C | Max power consump. | Code |
|------------------|------------------|-----------------|-------------------|-----------------------|-----------|----------|--------------------|----------|
| Cruise 42 Steel | 12 - 24 | 37 | 5 | 530x400x515 (350) | 15 | - | 2,7A | RE 88012 |
| Cruise 49 Steel | 12 - 24 | 49 | 5 | 520x400x510 | 18 | +5° - 6° | 2,7 A | RE 88004 |
| Cruise 65 Steel | 12 - 24 | 65 | 5 | 530x470x540 | 21 | +5° - 6° | 2,5 A | RE 88019 |
| Cruise 85 Steel | 12 - 24 | 85 | 8 | 625x495x555 | 24 | +5° - 6° | 4 A | RE 88005 |
| Cruise 130 Steel | 12 - 24 | 130 | 8 | 743x545x545 | 27 | +5° - 6° | 5 A | RE 88007 |



DR 85

STAINLESS STEEL DRAWER REFRIGERATOR

DESIGNED FOR NAUTICAL APPLICATION
New design: space saving and front opened. Available in stainless steel front panel
The DR 190 INOX is divided into 2 drawers

| Model | Voltage supply V | Volume total lt | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Temp. °C | Max power consump. | Code |
|-------------------------|------------------|-----------------|-------------------|-----------------------|-----------|----------|--------------------|----------|
| DR 49 Steel Clean Touch | 12 - 24 | 41 | 8 | 520x405x510 | 24 | - | 5 A | RE 88020 |
| DR 65 Steel Clean Touch | 12 - 24 | 54 | 11 | 526x470x545 | 28 | +5° | 5 A | RE 88092 |
| DR 85 Steel | 12 - 24 | 68 | 17 | 625x495x545 | 32 | +5° | 370 W | RE 88045 |
| DR 105 Steel | 12 - 24 | 105 | - | 520x520x770 (600) | 33 | +5° | 5 A | RE 88026 |
| DR 130 Steel | 12 - 24 | 114 | 16 | 745x545x545 | 35 | +5° | 429 W | RE 88046 |
| DR 190 Steel | 12 - 24 | 190 | - | 800 x 900 x 545 | 44 | +5° | 5 A | RE 88095 |

REFRIGERATOR UNITS



STAINLESS STEEL FREEZER CRUISER

INTERIOR WITH 4 DRAWERS.

The door is flush with a fixing flange and closure is guaranteed by an integrated snap lock. Extra insulation for excellent cooling performance and low energy consumption.

| Model | Voltage supply V | Total volume lt | Volume freezer lt | Dimensions (HxWxD) mm | Weight Kg | Operating temperature | Max power consump. | Code |
|-------------------------------|------------------|-----------------|-------------------|-----------------------|-----------|-----------------------|--------------------|----------|
| CRUISE 63 F Stainless steel | 12-24 | 63 | 63 | 620x495x555 | 23 | +5°-18° | 2,7 A | RE 88091 |
| CRUISE 63 Classic | 12-24 | 63 | 63 | 620x477x515 | 22 | +5°-18° | 2,7A | RE 88047 |
| CRUISE 65 F Stainless steel | 12-24 | 65 | - | 610x545x580 | 23 | -21° | 5 A | RE 88109 |
| CRUISE 65 Classic | 12-24 | 65 | 65 | 610x527x540 | 22 | +5°-18° | 5 A | RE 88048 |
| CRUISE 90 F Stainless steel | 12-24 | 90 | 90 | 745x525x505 | 29 | +5°-18° | 2,7 A | RE 88025 |
| CRUISE 90 Classic Clean Touch | 12-24 | 90 | 90 | 746x527x520 | 27 | +5°-18° | 2,7A | RE 88049 |

WATER COOLING UNIT



OVAL SHAPE EVAPORATOR

| Model | Max Volume fridge/freezer lt | Evaporator dimensions mm | Compressor dimensions mm | Compressor type | Code |
|-------|------------------------------|--------------------------|--------------------------|-----------------|----------|
| 2505 | 20/66 | 380 x 140 x 270 | 440 x 220 x 175 | BD50F | RE 88055 |

FLAT SHAPE EVAPORATOR

| Model | Max Volume fridge/freezer lt | Evaporator dimensions mm | Compressor dimensions mm | Compressor type | Code |
|-------|------------------------------|--------------------------|--------------------------|-----------------|----------|
| 2511 | 170/56 | 815 x 210 | 440 x 220 x 175 | BD50F | RE 88056 |
| 2512 | 200/66 | 1200 x 190 | 440 x 220 x 175 | - | RE 88057 |



AIR COOLING UNIT

REFRIGERATOR UNITS (OVAL EVAPORATOR)

DANFOSS COMPRESSOR. Absorption compressor: 0.6-2.7A(0.7-4A)

Compact unit regulated of a traditional thermostat

Fan cooled compressor unit designed for simple installation in existing top or side-loaded refrigerator boxes

| Model | Volume max lt | Type evaporator | Dimensions evaporator mm | Dimensions compressor mm | Type compressor | Code |
|--------|---------------|-----------------|--------------------------|--------------------------|-----------------|----------|
| GE 80 | 80/25 | Flat | 350 x 250 | 270 x 160 x 155 | BD35F | RE 88009 |
| GE 150 | 150/50 | Flat | 387 x 361 | 270 x 160 x 155 | BD35F | RE 88013 |



REFRIGERATOR UNITS (OVAL EVAPORATOR)

DANFOSS COMPRESSOR

Absorption compressor: (small oval 06-2.7A); (medium oval 07-4A); (big oval 0.9-5.2A)

Compact unit regulated of a traditional thermostat

Fan cooled compressor unit designed for simple installation in existing top or side-loaded refrigerator boxes

| Model | Volume max lt | Type evaporator | Dimensions evaporator mm | Dimensions compressor mm | Type compressor | Code |
|-------|---------------|-----------------|--------------------------|--------------------------|-----------------|----------|
| 2001 | 125/41 | Small oval | 240 x 85 x 210 | 270 x 160 x 155 | BD35F | RE 88011 |
| 2301 | 150/50 | Medium oval | 320 x 100 x 230 | 270 x 160 x 155 | BD35F | RE 88027 |
| 2501 | 200/65 | Large oval | 380 x 140 x 270 | 315 x 160 x 155 | BD50F | RE 88028 |




POWER PACK CONVERTER

Necessary to supply the refrigerator with AC current

Voltage supply:115/230Vac

Able to 12/24V DC bank battery



| Input voltage AC | Frequency Hz | Input voltage DC | Output voltage DC | Power W | Power A | Dimensions mm | Code |
|------------------|--------------|------------------|-------------------|---------|---------|----------------|-------------|
| 115/230 Vac | 47 - 63 | 12 - 24 V | 25,5 V | 100 | 4,2 | 250 x 130 x 43 | RE 88016/24 |

DANFOSS JUNCTION BOX

Easy to replace.

Voltage supply:12/24Vdc.

RE 88018



COOLED UNITS ITC DISPLAY MONITOR


The ITC Digital Display can clearly display, control and regulate the temperature in a refrigerated compartment from the exterior of a fridge/freezer cabinet. It is dedicated to people who desire a nice-looking interface, a refined product interaction and to reduce on board power consumption. Remote product interaction is extremely easy and accurate since data readings appear on the display, like temperature set or detected selection of energy saving operations, choice of 3 battery protection levels and compressor's operation mode settings, (ITC, Eco and Overcooling mode). Product integration is simple, since the device is fully compatible with the control unit IWM P/N SEG00002DA (Secop version 101N0212 for BD35/50F), allowing recess flush or wall mounted installation. RE 88050



INSULATED PANELS

Flat pack set of ready-cut insulated panels

The panels are covered on both sides with 3/32" plastic laminate of foodstuff quality. They have 46mm thick closed cell foam insulation in between. Easy to cut and glue together using a polyurethane sealant or mould resistant silicone resulting in joints. Cover strips for the edges of the lid are included



3 insulation panels measuring 978 x 479 x 50 mm each



RE 88021

STAINLESS STEEL BOILERS



NAUTIC BOILER BX

The tank is made of 1,5 mm gauge 316 Aisi stainless steel. Casing in 304 Aisi stainless steel. The electrical heating element is made of incoloy steel 220V or 115V (on request). Resistant to galvanic corrosion. Heat exchanger with wide exchange surface. The thermal insulation is high density polyurethane foam. Provided with relief/non return valve.
INSTALLATION: Vertical or horizontal.

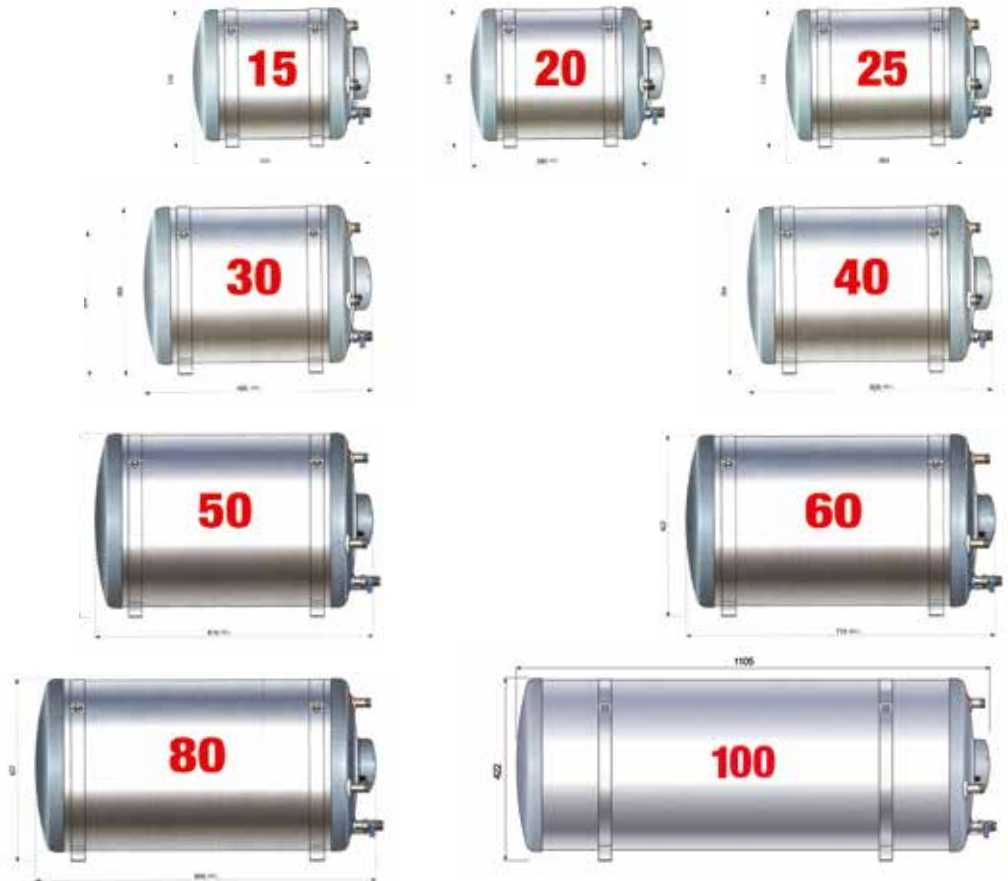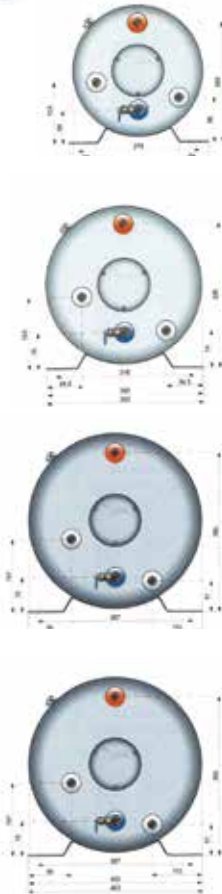







NAUTIC BOILER BX (CASING STAINLESS)

| Tank capacity lt | Tank capacity gal. | Electric element voltage | Electric element power | Exchanger | Tank pressure (test) | Max power | Outputs diameter | Dimensions mm | Weight Kg | Code |
|------------------|--------------------|--------------------------|------------------------|-----------|----------------------|-----------|------------------|---------------|-----------|----------|
| 15 | 3,9 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 405 | 9,5 | RE 88070 |
| 20 | 5,3 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 500 | 10,9 | RE 88071 |
| 25 | 6,6 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 605 | 12,3 | RE 88072 |
| 30 | 7,9 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 360 x 495 | 12,6 | RE 88074 |
| 40 | 10,5 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 360 x 620 | 14,7 | RE 88075 |
| 50 | 13,2 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 610 | 17,0 | RE 88077 |
| 60 | 15,8 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 715 | 19,0 | RE 88078 |
| 80 | 21,1 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 905 | 22,7 | RE 88079 |
| 100 | 26,4 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 1105 | 26,4 | RE 88081 |



NAUSIC BOILER B3 (CASING IN COMPOSITE MATERIAL)

The special composite material of the coating guarantees high-resistance to impact and marine corrosion and it allows a high anageability during installation. The tank is made of 1,5 mm gauge 316 Aisi stainless steel. The electrical heating element is made of incoloy steel resistant to galvanic corrosion. Heat exchanger with wide exchange surface.

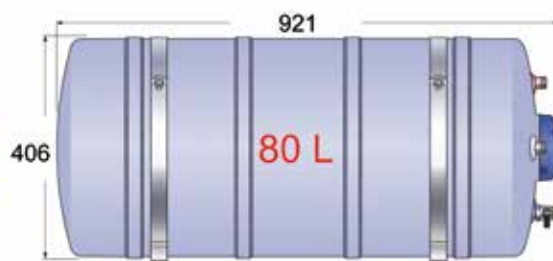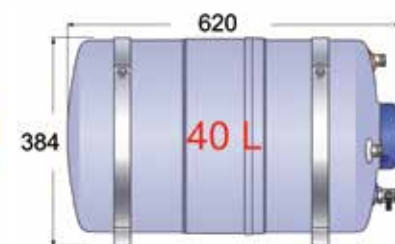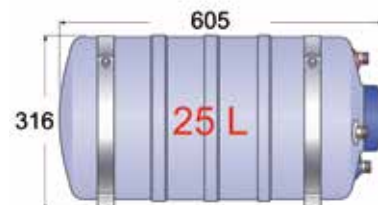

| Tank capacity lt | Tank capacity gal. | Electric element voltage | Electric element power | Exchanger | Tank pressure (test) | Max power | Outputs diameter | Dimensions mm | Weight Kg | Code |
|------------------|--------------------|--------------------------|------------------------|-----------|----------------------|-----------|------------------|---------------|-----------|----------|
| 15 | 3,9 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 405 | 7 | RE 88085 |
| 20 | 5,3 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 500 | 8,1 | RE 88086 |
| 25 | 6,6 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 300 x 605 | 8,5 | RE 88087 |
| 30 | 7,9 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 360 x 495 | 10,5 | RE 88088 |
| 40 | 10,5 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 360 x 620 | 11,7 | RE 88089 |
| 60 | 15,8 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 721 | 14,6 | RE 88093 |
| 80 | 21,1 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | Ø 400 x 921 | 17,8 | RE 88094 |

BOILER ABER MARINE


The new Aber Marine water heaters are made of AISI 316 stainless steel, is thermally insulated with high-density polyurethane foam, and protected by a case with integrated mounting brackets. There are two models: the first is lined with shock-proof plastic, the second are equipped with an AISI 316 stainless steel central section. Aber Marine water heaters guarantee high resistance and durability, as they are made with quality materials, suitable for the marine environment.

STANDARD VERSION



| Capacity Vac lt | Capacity Vac gallons | Voltage element V | Power W | Dimensions mm | Weight kg | Code |
|-----------------|----------------------|-------------------|---------|---------------|-----------|----------|
| 20 | 5,3 | 220 | 1200 | 366x430x358 | 7 | RE 88124 |
| 22 | 5,8 | 220 | 1200 | 287x558x297 | 8 | RE 88125 |
| 30 | 7,9 | 220 | 1200 | 366x540x358 | 9 | RE 88126 |
| 40 | 10,5 | 220 | 1200 | 366x660x358 | 11 | RE 88127 |

STAINLESS STEEL VERSION




| Capacity Vac lt | Capacity Vac gallons | Voltage element V | Power W | Dimensions mm | Weight kg | Code |
|-----------------|----------------------|-------------------|---------|---------------|-----------|----------|
| 30 | 7,9 | 220 | 1200 | 366x540x358 | 9,5 | RE 88120 |
| 40 | 10,5 | 220 | 1200 | 366x660x358 | 11,5 | RE 88121 |
| 60 | 15,8 | 220 | 1200 | 366x875x358 | 15 | RE 88122 |
| 80 | 21,1 | 220 | 1200 | 417x955x410 | 22 | RE 88123 |



NAUTIC BOILER BXS (SQUARE)

Made entirely in stainless steel.
 Tank in 316 Aisi stainless steel, casing in 304 Aisi stainless steel.
 Square-shape design for particularly easy installation.
 The thermal insulation is high density polyurethane foam.
 The electrical heating element is made of incoloy with adjustable safety thermostat. Heat exchanger with wide exchange surface.
 Provided with relief/non return valve that allows discharging of the water in case of disuse.
 Included adjustable safety thermostat.



| Tank capacity | Tank capacity gal | Electric element voltage | Electric element power | Exchanger | Tank pressure (test) | Max power | Outputs diameter | Dimensions | Weight Kg | Code |
|---------------|-------------------|--------------------------|------------------------|-----------|----------------------|-----------|------------------|-------------|-----------|----------|
| 25 lt | 6,6 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | 330x330x480 | 13,5 | RE 88068 |
| 40 lt | 10,56 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | 380x380x560 | 17 | RE 88069 |



RECTANGULAR NAUTIC BOILER BX

PLACEMENT ANYWHERE
 Two model: with or without heat exchanger
 Compact dimensions and tank in 316 stainless steel
 Easy to install and highly functional
 On request it is available with the heat exchanger only (without electric element)
 Included adjustable safety thermostat




| Tank capacity | Tank capacity gal | Electric element voltage | Electric element power | Exchanger | Tank pressure (test) | Max power | Outputs diameter | Dimensions mm | Weight Kg | Code |
|---------------|-------------------|--------------------------|------------------------|-----------|----------------------|-----------|------------------|---------------|-----------|----------|
| 16 lt | 4,22 | 220 V | 1200 W | Yes | 8 bar | 6 bar | Ø 1/2" | 520x350x180 | 10,5 | RE 88031 |



THERMOSTAT

Special adjustable safety thermostat with hand-rearmament
 Setting with a 60° temperature
 Possible to adjustable from 40° to 80° C



Thermostat

RE 88084



ELECTRIC ELEMENTS

The flange have a 1/4" thread
 Made of incoloy steel
 Resistant to corrosive agent



Electric element for stainless steel (220V-1200W)
 Electric element for stainless steel (115V-1200W)

RE 88082
 RE 88083



WATER MIXING VALVE KIT

It recommend installed in all boiler
 Advantages: it increases the autonomy of the water heater
 It avoids accidental burn, so children are safe
 Hot water pipes cannot be broken



Kit includes: thermostatic mixer, T junction, nipples, flexible connection.
 Ready to be installed on each water heater by Quick.





RE 88080

STAINLESS STEEL BOILERS



BOILER GIANNESCHI

Boiler in AISI 316 stainless steel
 Insulation: mineral wool
 Supply with resistance with safety thermostat
 Available in horizontal or vertical version,
 Or with 5 Kw resistance (on request)
 Non return valve install on cold water entry

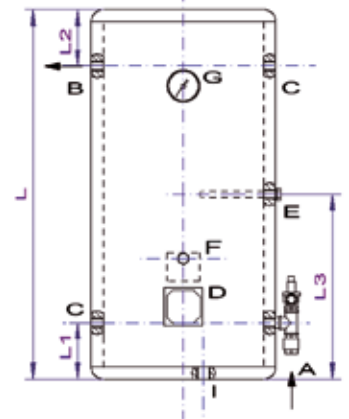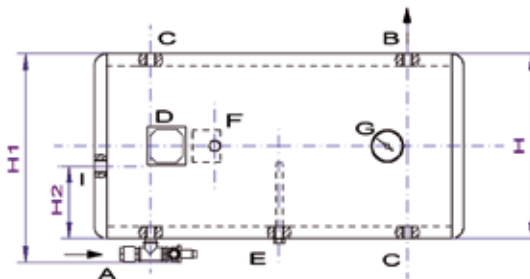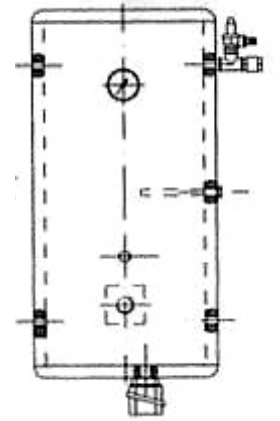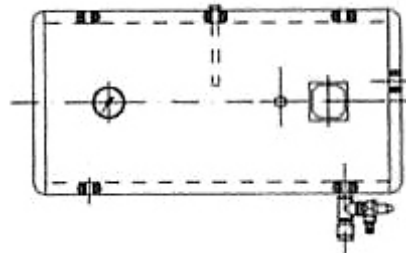


| Model | Capacity Vac | Voltage element | Power | Orientation | Case | Tank | Dimensions mm | Weight | Code |
|------------|--------------|-----------------|----------|---------------------|----------|----------|---------------|--------|----------|
| 25B100 | 100 lt | 230 V | 1,5 Kw | Vertical/horizontal | AISI 304 | AISI 316 | Ø 460 x 920 | 46 Kg | RE 88110 |
| 25B100T | 100 lt | 230/400 V | 3 Kw | Vertical/horizontal | AISI 304 | AISI 316 | Ø 460 x 920 | 46 Kg | RE 88111 |
| 25B120 | 120 lt | 230 V | 1,5 Kw | Vertical/horizontal | AISI 304 | AISI 316 | Ø 460 x 1120 | 68 Kg | RE 88112 |
| 25B120T | 120 lt | 230/400 V | 3 Kw | Vertical/horizontal | AISI 304 | AISI 316 | Ø 460 x 1120 | 68 Kg | RE 88113 |
| 03BOL150OR | 150 lt | 230/400 V | 3 + 3 Kw | Horizontal | AISI 304 | AISI 316 | Ø 510 x 1000 | 46 Kg | RE 88114 |
| 03BOL200VE | 200 lt | 230/400 V | 3 + 3 Kw | Vertical | AISI 304 | AISI 316 | Ø 510 x 1200 | 68 Kg | RE 88115 |



NANO

Extra low profile marine toilet:

- Quiet and fast flush cycle.
- Self contained and easy to install.
- No need of replacing seals or gaskets.
- Low water and electricity consumption.
- Super powerful macerator turbine technology (MAC4).

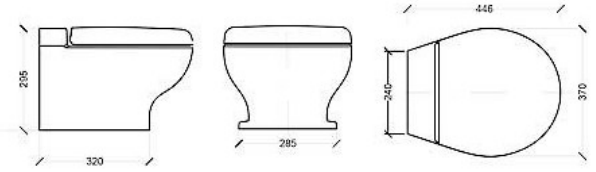


| Voltage | Type Macerator | Water consumption | Ø Diameter drain pipe | Dimensions mm | Weight Kg | Code |
|---------|----------------|-------------------|-----------------------|---------------|-----------|----------|
| 12 V | Mac 4 | 0,5/2 lt | 38,5 mm | 295x370x446 | 12,6 | RE 86232 |
| 24 V | Mac 4 | 0,5/2 lt | 38,5 mm | 295x370x446 | 12,6 | RE 86233 |



COMPASS

The narrow footprint and smart back of the Compass toilet gives maximum space and maximum flexibility wherever it is installed on board.

- Quiet and fast flush cycle.
- Self contained and easy to install.
- No need of replacing seals or gaskets.
- Low water and electricity consumption.
- Both Compass High and Short version are equipped with an innovative soft closing system
- Super powerful macerator turbine technology.

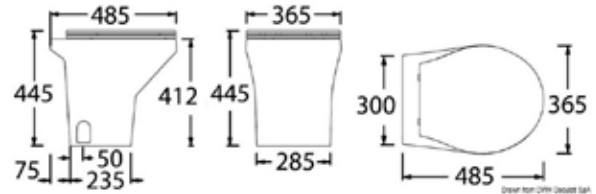


COMPASS STANDARD

| Voltage | Type Macerator | Water consumption | Ø Diameter drain pipe | Dimensions mm | Weight Kg | Code |
|---------|----------------|-------------------|-----------------------|---------------|-----------|----------|
| 12 V | Mac 4 | 0,5/2 lt | 38,5 mm | 445x365x485 | 21,5 | RE 86234 |
| 24 V | Mac 4 | 0,5/2 lt | 38,5 mm | 445x365x485 | 21,5 | RE 86235 |



COMPASS SHORT

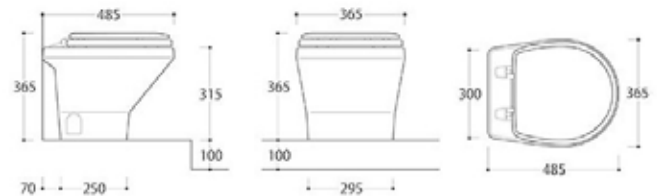

| Voltage | Type Macerator | Water consumption | Ø Diameter drain pipe | Dimensions mm | Weight Kg | Code |
|---------|----------------|-------------------|-----------------------|---------------|-----------|----------|
| 12 V | Mac 4 | 0,5/2 lt | 38,5 mm | 365x365x485 | 19,5 | RE 86236 |
| 24 V | Mac 4 | 0,5/2 lt | 38,5 mm | 365x365x485 | 19,5 | RE 86237 |



SILENCE PLUS 2G

W.C. electric SINGLE system (pump) or CENTRALIZED (electrovalve).
Absolute silent operation (special patented macerator).

Completely automatic washing cycle,
control panel with 2 switches

- Integrated air admittance valve
- Easy to install



| Supply V | System | Absorption | Consumption | Ø Drain pipe mm | Base mm | Dimensions mm | Code |
|----------|-------------|------------|--------------|-----------------|---------|---------------|------------|
| 12 | Single | 3,6 | 0,5 - 2,7 lt | 40 | 280x405 | 510x390x460 | RE 86238 |
| 24 | Single | 1,8 | 0,5 - 2,7 lt | 40 | 280x405 | 510x390x460 | RE 86239 |
| 12 | Centralized | 6,6 | 0,5 - 2,7 lt | 40 | 280x405 | 510x390x460 | RE 86238/C |
| 24 | Centralized | 3,3 | 0,5 - 2,7 lt | 40 | 280x405 | 510x390x460 | RE 86239/C |

BIDET SILENCE PLUS

RE 86240


Dimensions 510x390x400 mm
Base 280x390 mm
Weight 16 Kg

SILENCE PLUS 2G SHORT

W.C. electric SINGLE system (pump) or CENTRALIZED (electrovalve).
Absolute silent operation (special patented macerator).

Completely automatic washing cycle,
control panel with 2 switches

- Integrated air admittance valve
- Easy to install

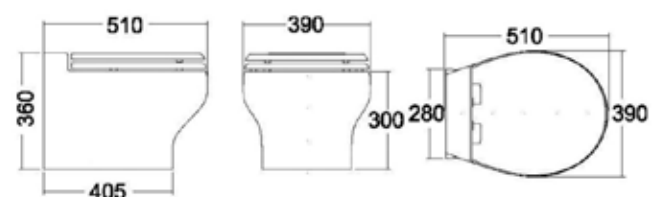

| Supply V | System | Absorption | Consumption | Ø Drain pipe mm | Base mm | Dimensions mm | Code |
|----------|-------------|------------|--------------|-----------------|---------|---------------|------------|
| 12 | Single | 3,6 | 0,5 - 2,7 lt | 40 | 280x405 | 510x360x405 | RE 86241 |
| 24 | Single | 1,8 | 0,5 - 2,7 lt | 40 | 280x405 | 510x360x405 | RE 86242 |
| 12 | Centralized | 6,6 | 0,5 - 2,7 lt | 40 | 280x405 | 510x360x405 | RE 86241/C |
| 24 | Centralized | 3,3 | 0,5 - 2,7 lt | 40 | 280x405 | 510x360x405 | RE 86242/C |

BIDET SILENCE PLUS SHORT

RE 86243

Dimensions 510x390x300 mm
Base 280x390 mm
Weight 14 Kg






ELEGANCE 2G

W.C. electric SINGLE system (pump) or CENTRALIZED (electrovalve).
 Absolute silent operation (special patented macerator).
 Completely automatic washing cycle,
 control panel with 2 switches

- Integrated air admittance valve
- Easy to install

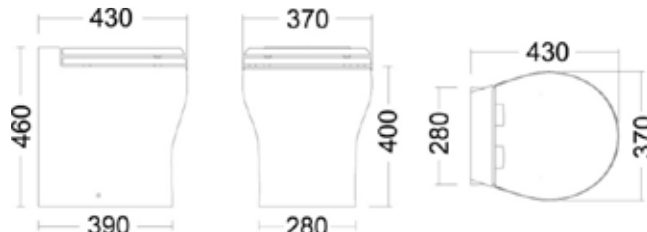

| Supply V | System | Absorption | Consumption | Ø Drain pipe mm | Base mm | Dimensions mm | Code |
|----------|-------------|------------|--------------|-----------------|---------|---------------|------------|
| 12 | Single | 3,6 | 0,5 - 2,7 lt | 40 | 285x380 | 430x370x460 | RE 86244 |
| 24 | Single | 1,8 | 0,5 - 2,7 lt | 40 | 285x380 | 430x370x460 | RE 86245 |
| 12 | Centralized | 6,6 | 0,5 - 2,7 lt | 40 | 285x380 | 430x370x460 | RE 86244/C |
| 24 | Centralized | 3,3 | 0,5 - 2,7 lt | 40 | 285x380 | 430x370x460 | RE 86245/C |

BIDET ELEGANCE

Dimensions 430x370x400 mm
 Base 280x370 mm
 Weight 13 Kg


RE 86246



ELEGANCE 2G SHORT

W.C. electric SINGLE system (pump) or CENTRALIZED (electrovalve).
 Absolute silent operation (special patented macerator).
 Completely automatic washing cycle,
 control panel with 2 switches

- Integrated air admittance valve
- Easy to install

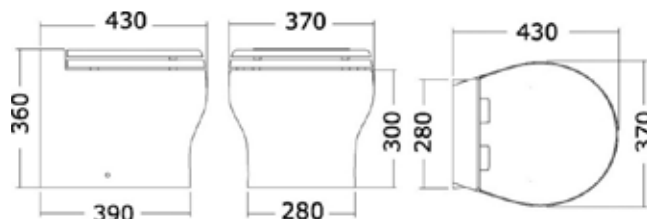

| Supply V | System | Absorption | Consumption | Ø Drain pipe mm | Base mm | Dimensions mm | Code |
|----------|-------------|------------|--------------|-----------------|---------|---------------|------------|
| 12 | Single | 3,6 | 0,5 - 2,7 lt | 40 | 280x370 | 430x370x360 | RE 86247 |
| 24 | Single | 1,8 | 0,5 - 2,7 lt | 40 | 280x370 | 430x370x360 | RE 86248 |
| 12 | Centralized | 6,6 | 0,5 - 2,7 lt | 40 | 280x370 | 430x370x360 | RE 86247/C |
| 24 | Centralized | 3,3 | 0,5 - 2,7 lt | 40 | 280x370 | 430x370x360 | RE 86248/C |

BIDET ELEGANCE SHORT

Dimensions 430x370x300 mm
 Base 280x370 mm
 Weight 11 Kg

RE 86249



All control panels have a tank monitoring led and water amount trim.

ALL IN ONE SFT. The All-in-one control panel has a controller directly integrated in the wall interface with the option of automatic bowl refill (single button) or the common double function before/after use.

PANEL WITH 1 BUTTON

The drain is activated by the “after use” button. After every flush the toilet bowl is automatically refilled with a certain quantity of water, ready for next use.

RE 86258



PANEL WITH 2 BUTTON


The drain is activated by 2 buttons “Before use” and “After use” and sailing mode. After every flush the toilet bowl remains empty for navigation.

RE 86259



SFT TOUCH MULTIFUNCTION PANEL

Ultimate touch control panel made of hi-tech tempered glass and LED back lighting with Smart Flush Technology: mooring and sailing mode, water amount trim, overflow protection and tank monitoring.

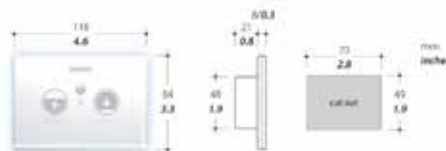


RE 86292



ECO ROCKER SWITCH

Easy to use, sturdy and durable manual activation switch. Reduced consumption of water and energy. To be used with compact series.



RE 86293




MACERATOR

- Easier waste transfer and no clogging as the cutting blades emulsify all waste
- Macerator chamber before the impeller for optimal grinding
- Silent in operation • Integrated in the ceramic toilet.

MAC MODEL 4

| Supply | Absorption | Prevalence | Flow | Code |
|--------|------------|------------|----------|----------|
| 12 Vdc | 30 A | 4 M | 130 lt/h | RE 86294 |
| 24 Vdc | 20 A | 4,5 M | 140 lt/h | RE 86295 |




MAC MODEL 11



| Supply | Absorption | Prevalence | Flow | Code |
|---------|------------|------------|-------------|----------|
| 12 Vdc | 30 A | 4 M | 130 lt/min. | RE 86296 |
| 24 Vdc | 20 A | 4,5 M | 140 lt/min. | RE 86297 |
| 230 Vdc | 5 A | 11 M | 270 lt/min. | RE 86298 |

GRAY WATER TRANSFER SYSTEMS

With a grey water system you create more flexibility and convenience on board. It allows you to install more sanitary appliances like a washbasin, a bidet, a shower, a dishwasher, a washing machine, on board. The grey water system grinds and pumps it to the collection tank.

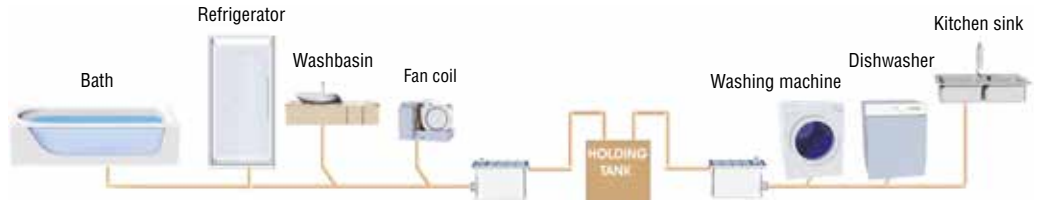

SANISPLIT NK ABOVE SEALEVEL

Patented split system • Efficient strong macerating pump • Silent operation: the silent pump operation combined with the internal rubber tank reduce the sound level • Easy to service: the removable part of the Sanisplit, containing the pump and the pressure switch, can be rapidly disengaged from the fixed parts.




| Voltage supply | Abs A | Ø internal pipe inlet | Capacity (lt/min) | Protection class | Max elev head (mt) | Dimensions mm | Weight Kg | Code |
|----------------|-------|-----------------------|-------------------|------------------|--------------------|---------------|-----------|----------|
| 12 | 40 | 40 | 270 | IP 67 | 11 | 470x175x270 | 8 | RE 86084 |
| 24 | 30 | 40 | 270 | IP 67 | 11 | 470x175x270 | 8 | RE 86085 |
| 230 | 5 | 40 | 270 | IP 67 | 11 | 470x175x270 | 8 | RE 86086 |




SANISPLIT NKS BELOW SEALEVEL

Stainless steel submersible Sanisplit

- Submersible waterproof system: Fully IP67 certified
- Stainless steel housing
- Proven macerator technology of Sanisplit NK
- Silent operation: The silent pump operation combined with the internal rubber tank reduce the sound level
- Easy to service: Once detached any service operation is easily possible without disconnecting the hoses

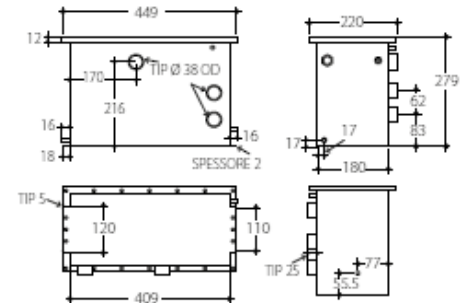

| Voltage supply | Abs A | Ø internal pipe inlet | Capacity (lt/min) | Protection class | Max elev head (mt) | Dimensions mm | Weight Kg | Code |
|----------------|-------|-----------------------|-------------------|------------------|--------------------|---------------|-----------|----------|
| 12 | 40 | 40 | 2770 | IP 67 | 10 | 449x220x279h | 13,7 | RE 86226 |
| 24 | 30 | 40 | 2770 | IP 67 | 10 | 449x220x279h | 13,7 | RE 86227 |
| 230 | 5 | 40 | 2770 | IP 67 | 10 | 449x220x279h | 13,7 | RE 86228 |

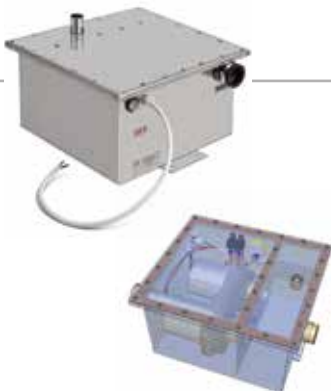

TWIN FOR PARTICULARLY SEVERE USE




| Voltage supply | Abs A | Ø internal pipe inlet | Capacity (lt/min) | Protection class | Max elev head (mt) | Dimensions mm | Weight Kg | Code |
|----------------|-------|-----------------------|-------------------|------------------|--------------------|---------------|-----------|----------|
| 12 | 40 | 40 | 554 | IP 67 | 11 | 340x350x245 | 24 | RE 86229 |
| 24 | 25 | 40 | 554 | IP 67 | 11 | 340x350x245 | 24 | RE 86230 |
| 230 | 3 | 40 | 554 | IP 67 | 11 | 340x350x245 | 24 | RE 86231 |

VISION-IMPACT TOILETS



VISION


Can be installed with a single system (with inlet pump) or centralized system (with electrovalve)
 Complete noiselessness of operation (special patented turbine pump)
 Completely automatic washing cycle, control panel with 2 switches
 Predisposed to discharge in holding tank
 White porcelain bowl, seat and cover of wood/polished polyester

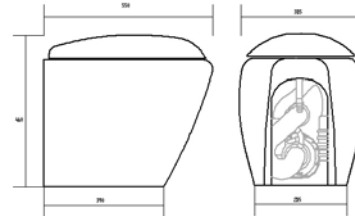

| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|----------|
| 12 | Single | 3,6 | 40 | 20 | 285x390 | 550x385x460 | RE 86164 |
| 24 | Single | 1,8 | 25 | 20 | 285x390 | 550x385x460 | RE 86165 |
| 12 | Centralized | 6,6 | 40 | 20 | 285x390 | 550x385x460 | RE 86166 |
| 24 | Centralized | 3,3 | 25 | 20 | 285x390 | 550x385x460 | RE 86167 |
| 230 | Centralized | 0,4 | 3 | 20 | 285x390 | 550x385x460 | RE 86178 |

BIDET VISION

Dimensions 550x385x415 mm
 Base 285x390 mm

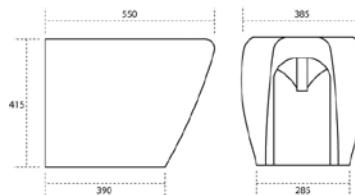


RE 86215



IMPACT


Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Complete noiselessness of operation (special patented turbine pump).
 Completely automatic washing cycle, control panel with 2 switches.
 Predisposed to discharge in holding tank.
 White porcelain bowl, seat and cover of wood/polished polyester.



| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|----------|
| 12 | Single | 3,6 | 40 | 20 | 340x520 | 520x450 | RE 86200 |
| 24 | Single | 1,8 | 25 | 20 | 340x520 | 520x450 | RE 86201 |
| 12 | Centralized | 6,6 | 40 | 20 | 340x520 | 520x450 | RE 86202 |
| 24 | Centralized | 3,3 | 25 | 20 | 340x520 | 520x450 | RE 86203 |
| 230 | Centralized | 0,4 | 3 | 20 | 340x520 | 520x450 | RE 86204 |


BIDET IMPACT

Dimensions 520x340x415 mm
 Base 340x520 mm

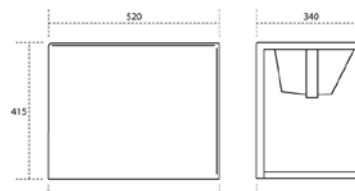


RE 86216

RACE-SKY TOILETS

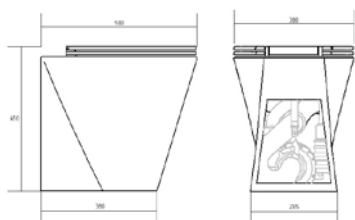

RACE

Created high performances sailing boats
Created for regatta sailing boat. Can be installed with a single system (with inlet pump) or centralized system (with electrovalve)
Absolute noiselessness of operation (special patented turbine pump)
Completely automatic washing cycle, control panel with 2 switches
Predisposed to discharge in holding tank

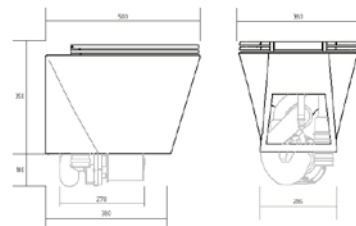

RACE


| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 40 | 20 | 285x380 | 500x380x450 | RE 86082 |
| 24 | Single | 1,8 | 25 | 20 | 285x380 | 500x380x450 | RE 86083 |
| 12 | Centralized | 6,6 | 40 | 20 | 285x380 | 500x380x450 | RE 86082/C |
| 24 | Centralized | 3,3 | 25 | 20 | 285x380 | 500x380x450 | RE 86083/C |

RACE SHORT

| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|----------|
| 12 | Single | 3,6 | 40 | 20 | 285x380 | 500x380x450 | RE 86205 |
| 24 | Single | 1,8 | 25 | 20 | 285x380 | 500x380x450 | RE 86206 |
| 12 | Centralized | 6,6 | 40 | 20 | 285x380 | 500x380x450 | RE 86207 |
| 24 | Centralized | 3,3 | 25 | 20 | 285x380 | 500x380x450 | RE 86208 |

BIDET RACE


Dimensions 500x380x400 mm
Base 285x380 mm



RE 86218

BIDET RACE SHORT


Dimensions 500x380x300 mm
Base 285x380 mm



RE 86219

SKY

Wall mounted
Complete noiselessness of operation (special patented turbine pump)
Completely automatic washing cycle, control panel with 2 switches
Predisposed to discharge in holding tank
White porcelain bowl, seat and cover of wood/polished polyester

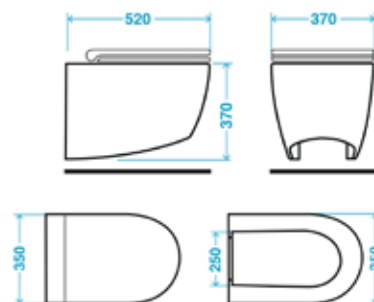

| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 40 | 20 | 280x400 | 530x380 | RE 86080 |
| 24 | Single | 1,8 | 25 | 20 | 280x400 | 530x380 | RE 86081 |
| 12 | Centralized | 6,6 | 40 | 20 | 280x400 | 530x380 | RE 86080/C |
| 24 | Centralized | 3,3 | 25 | 20 | 280x400 | 530x380 | RE 86081/C |

BIDET SKY


Dimensions 560x380x400 mm
Base 280x400 mm

RE 86217



ARTIC STANDARD

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve)
Complete noiselessness of operation (special patented turbine pump)
Completely automatic washing cycle, control panel with 2 switches
Predisposed to discharge in holding tank
White porcelain bowl, seat and cover of wood/polished polyester.

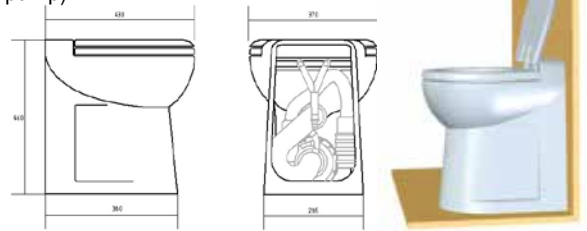


| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 40 | 20 | 285x380 | 430x370x460 | RE 86076 |
| 24 | Single | 1,8 | 25 | 20 | 285x380 | 430x370x460 | RE 86077 |
| 12 | Centralized | 6,6 | 40 | 20 | 285x380 | 430x370x460 | RE 86076/C |
| 24 | Centralized | 3,3 | 25 | 20 | 285x380 | 430x370x460 | RE 86077/C |
| 230 | Centralized | 0,4 | 3 | 20 | 285x380 | 430x370x460 | RE 86209 |

Optional: Kit bidet 12V (to add at the moment of the order)
Optional: Kit bidet 24V (to add at the moment of the order)

RE 86040
RE 86041

BIDET ARTIC PLUS

Dimensions 500x380x400 mm
Base 285x415 mm

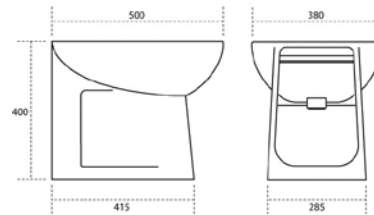


RE 86220



ARTIC SHORT

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Complete noiselessness of operation (special patented turbine pump)
Completely automatic washing cycle, control panel with 2 switches
Predisposed to discharge in holding tank
White porcelain bowl, seat and cover of wood/polished polyester.

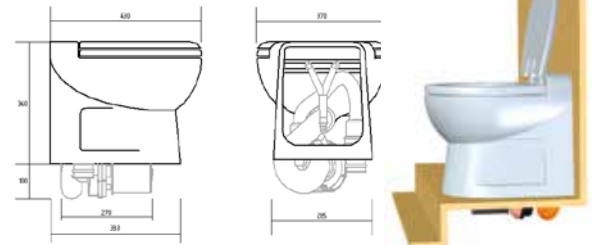

| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 40 | 20 | 285x380 | 430x370x360 | RE 86078 |
| 24 | Single | 1,8 | 25 | 20 | 285x380 | 430x370x360 | RE 86079 |
| 12 | Centralized | 6,6 | 40 | 20 | 285x380 | 430x370x360 | RE 86078/C |
| 24 | Centralized | 3,3 | 25 | 20 | 285x380 | 430x370x360 | RE 86079/C |
| 230 | Centralized | 0,4 | 3 | 20 | 285x380 | 430x370x360 | RE 86210 |


SHORT VERSION: Are manufactured to allow the installation on a step

Optional: Kit bidet 12V (to add at the moment of the order)
Optional: Kit bidet 24V (to add at the moment of the order)

RE 86040
RE 86041

BIDET ARTIC PLUS SHORT

Dimensions 500x380x300 mm
Base 285x415 mm

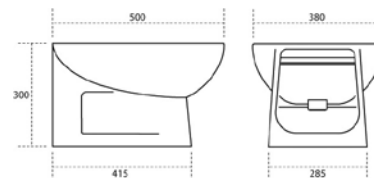

RE 86221



MATCH SHORT

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Complete noiselessness of operation (special patented turbine pump) Completely automatic washing cycle, control panel with 2 switches Predisposed to discharge in holding tank Oblique white porcelain bowl, seat and cover of wood/polished polyester.



| Voltage V | System | Absorption Inlet pump | Absorption Outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 35 | 40 | 375x330 | 480x375x350 | RE 86170 |
| 24 | Single | 1,8 | 25 | 40 | 375x330 | 480x375x350 | RE 86171 |
| 12 | Centralized | 6,6 | 35 | 40 | 375x330 | 480x375x350 | RE 86170/C |
| 24 | Centralized | 3,3 | 25 | 40 | 375x330 | 480x375x350 | RE 86171/C |

Optional: Kit bidet 12V (to add at the moment of the order)
 Optional: Kit bidet 24V (to add at the moment of the order)

RE 86040
 RE 86041

BIDET MINI PLUS



Dimensions 500x330x400 mm
 Base 290x380 mm



RE 86224

ARTIC SHORT CUT

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Absolute noiselessness of operation (special patented turbine pump) Completely automatic washing cycle, control panel with 2 switches Predisposed to discharge in holding tank White porcelain bowl, seat and cover of wood/polished polyester.



| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 35 | 40 | 285x360 | 430x370x360 | RE 86172 |
| 24 | Single | 1,8 | 25 | 40 | 285x360 | 430x370x360 | RE 86173 |
| 12 | Centralized | 6,6 | 35 | 40 | 285x360 | 430x370x360 | RE 86172/C |
| 24 | Centralized | 3,3 | 25 | 40 | 285x360 | 430x370x360 | RE 86173/C |


SHORT VERSION: Are manufactured to allow the installation on a step

Optional: Kit bidet 12V (to add at the moment of the order)
 Optional: Kit bidet 24V (to add at the moment of the order)

RE 86040
 RE 86041

BIDET MINI SHORT

Dimensions 435x330x330 mm
 Base 295x305 mm




RE 86225





SMART CLASSIC

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Complete noiselessness of operation (special patented turbine pump). Completely automatic washing cycle, control panel with 2 switches. Predisposed to discharge in holding tank. White porcelain bowl, seat and cover of wood/polished polyester.



| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 35 | 40 | 285x415 | 500x365x450 | RE 86276 |
| 24 | Single | 1,8 | 25 | 40 | 285x415 | 500x365x450 | RE 86277 |
| 12 | Centralized | 6,6 | 35 | 40 | 285x415 | 500x365x450 | RE 86276/C |
| 24 | Centralized | 3,3 | 25 | 40 | 285x415 | 500x365x450 | RE 86277/C |
| 230 | Centralized | 0,4 | 3 | 40 | 285x415 | 500x365x450 | RE 86278 |

Optional: Kit bidet 12V (to add at the moment of the order)


RE 86040

Optional: Kit bidet 24V (to add at the moment of the order)

RE 86041

BIDET SMART CLASSIC

Dimensions 500X365X410 mm
Base 285X415 mm




RE 86279



SMART SHORT

Can be installed with a single system (with inlet pump) or centralized system (with electrovalve). Complete noiselessness of operation (special patented turbine pump). Completely automatic washing cycle, control panel with 2 switches. Predisposed to discharge in holding tank. White porcelain bowl, seat and cover of wood/polished polyester.



| Voltage V | System | Absorption inlet pump | Absorption outlet pump | Ø internal pipe mm | Base mm | Dimensions mm | Code |
|-----------|-------------|-----------------------|------------------------|--------------------|---------|---------------|------------|
| 12 | Single | 3,6 | 35 | 40 | 285x385 | 480x365x350 | RE 86280 |
| 24 | Single | 1,8 | 25 | 40 | 285x385 | 480x365x350 | RE 86281 |
| 12 | Centralized | 6,6 | 35 | 40 | 285x385 | 480x365x350 | RE 86280/C |
| 24 | Centralized | 3,3 | 25 | 40 | 285x385 | 480x365x350 | RE 86281/C |
| 230 | Centralized | 0,4 | 3 | 40 | 285x385 | 480x365x350 | RE 86282 |

SHORT VERSION: Are manufactured to allow the installation on a step

Optional: Kit bidet 12V (to add at the moment of the order)


RE 86040

Optional: Kit bidet 24V (to add at the moment of the order)

RE 86041

BIDET SMART SHORT

Dimensions 480X365X310 mm
Base 385x285 mm



RE 86283



GRINDING SYSTEM

The high speed of rotation of the VORTEX pump and the geometric design of its piping create a great vacuum able to remove water and organic waste from the bowl.
The high level of performance ensures the greatest possible flexibility in planning the route of the discharge hoses, allowing it to reach significant distances and heights.

| Voltage V | Absorption A | Capacity lt/min | Ø mm connections | | Max elev head mt | Code |
|--------------|-----------------|--------------------|------------------|--------|---------------------|----------|
| | | | Inlet | Outlet | | |
| 12 | 40 | 277 | 40 | 20 | 9 | RE 86068 |
| 24 | 25 | 277 | 40 | 20 | 9 | RE 86069 |
| 230 | 3 | 277 | 40 | 20 | 9 | RE 86073 |



CONTROL PANEL WITH ONE SWITCH

A part of water remains in the toilette
After using the toilette, press the pushbutton and it starts a complete automatic flushing cycle

| Button | Cover color | Installation | Dimensions | Recess hole | Recess depth | Code |
|--------|-----------------|--------------|-----------------|-------------|--------------|----------|
| 1 | 1 white 1 black | Recess | 147,6 x 91,6 mm | 110 x 76 mm | 46 mm | RE 86062 |



CONTROL PANEL WITH TWO SWITCHES

The toilette is completely dry when it is in rest position
Pressing "before use" button sends a specific quantity of water into the WC
After using the toilette, pressing "after use" pushbutton starts a completely automatic flushing cycle
Advantage: The toilette is completely dry when in the rest position

| Button | Cover color | Installation | Dimensions | Recess hole | Recess depth | Code |
|--------|-----------------|--------------|-----------------|-------------|--------------|----------|
| 2 | 1 white 1 black | Recess | 147,6 x 91,6 mm | 110 x 76 mm | 46 mm | RE 86070 |



SLIM PANEL

Reduced depth (1cm)
Compatible with plaques Bticino Living, Vimar Plana, Vimar Eikon

Version: 1 button
2 buttons

RE 86158
RE 86159



TANK SENSOR

It is a maximum-level sensor
It is activated by air pressure generated by the level of the water
It must be installed in the upper part of the tank with the rubber hose that enters the tank
The pressure switch, located outside the tank, is a normal on-off switch, being electrically connected with the control panel which has a red led that warns the tank is nearly full
Usually the led is green. The sensor may be used to commutate different alarms

RE 86020



KIT PIPE

Kit included two rubber pipes:
N°1 rubber siphon pipe for connection bowl pump
N°1 discharge rubber pipe

RE 86019



SOLENOID VALVES

The solenoid valves are provided the chiller water hammer.
This device is extremely effective in eliminating the noise and the vibrations that propagate along the pipe water intake.

Version: 12V
24V
230V

RE 86160
RE 86161
RE 86162



STANDARD ELECTRIC TOILETTE

White vitreous china bowl and wooden seat

Compact design

Self priming pump with elastic impeller

High performance macerator

Soft-Close seat

| Version | Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|---------|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| COMPACT | 12 | 17 | 335x420x390 | 19 | 25 | 11 | RE 86001 |
| COMPACT | 24 | 8 | 335x420x390 | 19 | 25 | 11 | RE 86002 |
| COMFORT | 12 | 17 | 365x460x385 | 19 | 25 | 12 | RE 86250 |
| COMFORT | 24 | 8 | 365x460x385 | 19 | 25 | 12 | RE 86251 |
| LOW | 12 | 17 | 465x345x315 | 19 | 25 | 10 | RE 86252 |
| LOW | 24 | 8 | 465x345x315 | 19 | 25 | 10 | RE 86253 |

LUXURY ELECTRIC TOILETTE

Very comfortable and nice to be seen, just like a home toilette

Stainless steel screws

Brass pump and base anti-crash material

It can be installed either above or below the sea level

High performance pump that allows drainage of waste up to 1,5 m

Soft-Close seat

| Version | Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|--------------|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| STANDARD | 12 | 30 | 365x455x455 | 19 | 25 | 22 | RE 86071 |
| STANDARD | 24 | 16 | 365x455x455 | 19 | 25 | 22 | RE 86072 |
| BEVELLED | 12 | 26 | 365x455x455 | 19 | 25 | 22 | RE 86254 |
| BEVELLED | 24 | 13 | 365x455x455 | 19 | 25 | 22 | RE 86255 |
| LOW | 12 | 30 | 365x455x385 | 19 | 25 | 20 | RE 86087 |
| LOW | 24 | 15 | 365x455x385 | 19 | 25 | 20 | RE 86088 |
| LOW BEVELLED | 12 | 26 | 365x455x385 | 19 | 25 | 21 | RE 86256 |
| LOW BEVELLED | 24 | 13 | 365x455x385 | 19 | 25 | 21 | RE 86257 |

LAGUNA ELECTRIC TOILET

Base in shockproof material and brass pump

Installable under or over the floating line

High performance pump allows drainage of waste up to 3,5 m high

Self priming up to 1,2 m

Soft-Close seat

| Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| 12 | 24 | 340x405x410 | 19 | 25 | 18 | RE 86059 |
| 24 | 12 | 335x420x390 | 19 | 25 | 18 | RE 86060 |



MANUAL TOILETTE

White china bowl with wooden seat and cover
Easy to charge and discharge
Base and pump in resistant plastic
Soft-Close seat

| Version | Dimensions mm | Ø Inlet pipe mm | Ø Outlet pipe mm | Weight Kg | Code |
|---------|---------------|-----------------|------------------|-----------|----------|
| COMPACT | 400x450x340 | 19 | 38 | 9 | RE 86003 |
| COMFORT | 460x470x335 | 19 | 38 | 10 | RE 86042 |
| LOW | 400x450x290 | 19 | 38 | 8 | RE 86043 |



TANK FOR MANUAL WC

Suitable for all marine toilets with compact cup, TMC, Groco, Jabsco, Johnson Pump, Thetford type.

Dimensions: 500x400x230

RE 86067



WC COMPACT AND COMFORT KIT MACERATOR

Turn your manual WC in electric
Fastened with 4 bolts, wheelbase 95mm
High performance pump allows drainage of waste up to 5 mt high
Interchangeable kit for Jabsco, TMC and Johnson Pump toilet

| Voltage V | Ø Inlet mm | Ø Outlet mm | Code |
|-----------|------------|-------------|----------|
| 12 | 19 | 25 | RE 86004 |
| 24 | 19 | 25 | RE 86005 |



WC COMPACT AND COMFORT KIT VACUUM

Turn your manual WC in electric
Fastened with 4 bolts, wheelbase 95mm

| Voltage V | Ø Inlet mm | Ø Outlet mm | Code |
|-----------|------------|-------------|----------|
| 12 | 19 | 25 | RE 86016 |
| 24 | 19 | 25 | RE 86017 |



SPARE ELECTRO VALVE FOR TOILET

Works at 12/24 V

RE 86018

MANUAL PUMP FOR TOILETTE

Pump + base

RE 86006



REPLACEMENT SEAT

When ordering, specify the WC model

RE 86074



Designed in compliance with the new regulations for the discharge of black water in ports.
Equipped with an electronic panel that automatically adjusts the loading and unloading of water.
Very quiet, fully automatic washing cycle.
Very low water consumption (1-2.5 liters).
The drain pump allows you to reach up to 7 m in height and 70 m in length.
Specify in the order if with solenoid valve or with pump.

STANDARD VACUUM TOILETTE

White porcelain cup with a wooden toilet seat
Compact design and low profile
Soft-Close seat

| Version | Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|---------|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| COMPACT | 12 | 17 | 335x420x390 | 19 | 25 | 10 | RE 86260 |
| COMPACT | 24 | 8 | 335x420x390 | 19 | 25 | 10 | RE 86261 |
| COMFORT | 12 | 17 | 365x460x385 | 19 | 25 | 11 | RE 86262 |
| COMFORT | 24 | 8 | 365x460x385 | 19 | 25 | 11 | RE 86263 |



LUXURY VACUUM TOILETTE

Very comfortable and nice to be seen, just like a home toilette
Stainless steel screws
Brass pump and base anti-crash material
It can be installed either above or below the sea level
Soft-Close seat

| Version | Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|----------|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| STANDARD | 12 | 30 | 365x455x455 | 19 | 25 | 21 | RE 86264 |
| STANDARD | 24 | 16 | 365x455x455 | 19 | 25 | 21 | RE 86265 |
| LOW | 12 | 30 | 365x455x385 | 19 | 25 | 20 | RE 86266 |
| LOW | 24 | 16 | 365x455x385 | 19 | 25 | 20 | RE 86267 |



LAGUNA VACUUM TOILET

Based in protective material and brass pump
It can be installed both above and below the waterline
Soft-Close seat

| Voltage V | Absorption A | Dimensions mm | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Code |
|-----------|--------------|---------------|-----------------|------------------|-----------|----------|
| 12 | 19 | 340x405x410 | 19 | 25 | 18 | RE 86268 |
| 24 | 10 | 335x420x390 | 19 | 25 | 18 | RE 86269 |



LITE FLUSH

A new electric toilette designed to instantly retro-fit your existing manual. Toilette or to give your bathroom a modern stylist look. The innovative design offers both low power and water consumption with an integral rinse and waste pump system. Lightweight and compact. Low water usage-a. 2 litres per flush. Slow close seat and lid. Footswitch operated.

| Model | Voltage | Material | Color | Water consumption | Dimensions mm | Weight Kg | Code |
|------------|---------|----------|--------|-------------------|---------------|-----------|----------|
| LITE FLUSH | 12 V | Plastic | bianco | 1,2 lt | 407x342x373 | - | RE 86025 |
| LITE FLUSH | 24 V | Plastic | bianco | 1,2 lt | 407x342x373 | - | RE 86026 |



ELECTRIC TOILETS

Compact design with low profile. Easy to use. Self priming pump with elastic impeller. Permanent magnet motor with stainless steel driveshaft. High capacity grinding pump. White china bowl, seat and cover with tough baked enamel coating. Corrosion resistant materials.

| Voltage V | Absorption A | Fuse A | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Dimensions mm | Code |
|-----------|--------------|--------|-----------------|------------------|-----------|-----------------|----------|
| 12 | 18 | 25 | 3/4" | 1" | 14,5 | 451 x 352 x 351 | RE 86030 |
| 24 | 9 | 15 | 3/4" | 1" | 14,5 | 451 x 352 x 351 | RE 86031 |

Kits gaskets for electric toilette

RE 86032



MANUAL TOILETS

Compact design with low profile. Powerful swirl action for efficient flushing. Automatic vacuum breaker. Pump and base in cyclac plastic. Reversible pump mounting for choice of right or left handed installation. White china bowl, seat and cover with tough baked enamel coating. Corrosion resistant materials throughout for reliable salt water service.

| Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Dimensions mm | Code |
|-----------------|------------------|-----------|-----------------|----------|
| 3/4" | 1 1/2" | 11,6 | 330 x 440 x 310 | RE 86009 |

Kits gaskets for manual toilette

RE 86033



DELUXE TOILETS

Simple to install. With angled back it is easy to mount against a sloping surface or in a corner. All aspect optimized for minimal water usage and near silent operation. Anti-blocking centrifugal flush pump. Included solenoid valve for connection at centralized system. Supplied with self priming pump to bring in sea to rinse and siphon breaker.

| Voltage V | Absorption A | Fuse A | Inlet pipe Ø mm | Outlet pipe Ø mm | Weight Kg | Dimensions mm | Code |
|-----------|--------------|--------|-----------------|------------------|-----------|-----------------|----------|
| 12 | 18 | 25 | 3/4" | 1"1/2 | 20 | 450 x 350 x 445 | RE 86168 |
| 24 | 9 | 15 | 3/4" | 1"1/2 | 20 | 450 x 350 x 445 | RE 86169 |

MANUAL PUMP FOR TOILETTE

Can be installed above or below the waterline

RE 86063



ELECTRIC CONVERSION KIT

Vertical kit for manual toilette jabsco. Compatible with compact and regular bowl, left or right hand manual toilets. Existing discharge plumbing remains undisturbed. Simple rotary control knob offers choice of "flush and discharge" or "discharge only". Two powerful self-priming pumps for above or below waterline installation. Dual role macerates waste for both overboard discharge and holding tank. Retains existing jockey valve to maintain automatic back-flow protection.

| Voltage V | Absorption A | Fuse A | Inlet pipe Ø mm | Outlet pipe Ø mm | Dimensions mm | Code |
|-----------|--------------|--------|-----------------|------------------|----------------|----------|
| 12 | 25 | 25 | 19 | 38 | 148 x 86 x 266 | RE 86027 |
| 24 | 13 | 15 | 19 | 38 | 148 x 86 x 266 | RE 86028 |



PUMP MACERATOR ABER MARINE

Plastic macerator and rubber impeller discharge pump
 Self priming up to 2 mt. vertical lift.
 43 LPM output at 5 mt. total head
 Macerates and discharges water and waste mixtures.

| Voltage V | Absorption A | Capacity lt/min | Inlet port connections | Outlet port connections | Dimensions mm | Code |
|-----------|--------------|-----------------|------------------------|-------------------------|---------------|----------|
| 12 | 12 | 43 | 38 mm | 25 mm | 240x130x90 | RE 86021 |
| 24 | 6 | 43 | 38 mm | 25 mm | 240x130x90 | RE 86023 |



PUMP MACERATOR

Ideal for evacuating holding tank
 High capacity and high reliability
 Nitrile impeller - Self priming up to 2 m vertical lift



| Voltage V | Absorption A | Capacity lt/min | Inlet port connections | Outlet port connections | Dimensions mm | Code |
|-----------|--------------|-----------------|------------------------|-------------------------|----------------|----------|
| 12 | 16 | 46 | 1" 1/2 | 1" | 280 x 110 x 80 | RE 86064 |
| 24 | 8 | 46 | 1" 1/2 | 1" | 281 x 110 x 80 | RE 86065 |



PUMP MACERATOR

Ideal for evacuating holding tank
 High capacity and high reliability - Ignition protected

| Voltage V | Absorption A | Capacity lt/min | Inlet port connections | Outlet port connections | Dimensions mm | Code |
|-----------|--------------|-----------------|------------------------|-------------------------|----------------|----------|
| 12 | 12 | 43 | 1" 1/2 | 1" | 240 x 130 x 90 | RE 86007 |
| 24 | 7 | 43 | 1" 1/2 | 1" | 240 x 130 x 90 | RE 86008 |
| 12 | 14 | 47 | 1" 1/2 | 1" | 260 x 130 x 90 | RE 86045 |
| 24 | 8 | 47 | 1" 1/2 | 1" | 260 x 130 x 90 | RE 86046 |



VENTED LOOP JABSCO

Vented loops guard against danger of water siphoning over pipework loops in below the waterline installations of toilets and bilge pump



Vented loop Ø 38mm
 Vented loop Ø 19mm

RE 86034
 RE 86035



VENTED LOOP JABSCO

Vented loops guard against danger of water siphoning over pipework loops in below the waterline installations of toilets and bilge pump

Vented loop Ø 38mm
 Vented loop Ø 25mm
 Vented loop Ø 19mm

RE 86037
 RE 86075
 RE 86038



Y VALVE JABSCO



Two way valve
Allows to be pumped directly overboard or into a holding tank
Allows two bilge sections to be emptied by one pump
Waste and corrosion resistant construction throughout
Rotating discharge ports simplifies installation

| N° way | Materials | Weight Kg | Inlet port connections | Outlet port connections | Dimensions mm | Code |
|--------|-----------|-----------|------------------------|-------------------------|-----------------|----------|
| 3 | ABS | 0,90 | 1" 1/2 | 1" 1/2 | 194 x 184 x 117 | RE 86036 |



Y VALVE

A new universal strong y valve for use in bilge application
Can be padlocked. ABS body

| N° way | Color | Weight Kg | Inlet port connections | Outlet port connections | Dimensions mm | Code |
|--------|-------|-----------|------------------------|-------------------------|-----------------|----------|
| 3 | White | 0,5 | 1" 1/2 | 1" 1/2 | 140 x 150 x 150 | RE 86039 |



Y 2005 VALVE

For use in bilge applications
Standard connections 38 mm and extra 25 mm
Weight 0,8 Kg - Mesures 200x800x60

RE 86010



WASTE HOLDING TANK



Waste holding tank with pump, filter and floating switch
5 inputs (19-19-25-28.6-38) and one output at 19 of diameter
Internal check valve for preventing back flow
Removable stainer

| Voltage V | Capacity lt/min | Input diameter mm | Output diameter mm | Dimensions mm | Code |
|-----------|-----------------|---------------------|--------------------|-----------------|----------|
| 12 | 50 | Ø 19 - 25 - 30 - 38 | Ø 19 | 235 x 285 x 130 | RE 86022 |
| 24 | 50 | Ø 19 - 25 - 30 - 38 | Ø 19 | 235 x 285 x 130 | RE 86024 |



CARBON FILTERS

Made in light-weight metal alloy and nylon
Must be placed in the higher point of the boxes air valve
Carbon must not be in contact with liquid contained in the box

RE 86029

**SINGLE LEVER MIXERS**

Single lever with ceramic valves
Swivelling spout
Max projection: 210 mm
Max height: 130 mm

RE 86047

**MIXER TAP**

Single lever + extractable shower with flexible pipe of 1.5mt
Double jet switch
Max projection: 240 mm
Max height: 170 mm

RE 86048

**SINGLE LEVER CERAMIC MIXER**

Single lever chromed brass mixer, perfect for showers
Wall installation with flanges
Height: 110 mm
Diameter: 40 mm

RE 86049

**MIXER TAP**

In chromed brass
Handwheel movement
Max projection: 210 mm
Height: 190 mm

RE 86050

**MIXER TAP**

Single lever + extractable shower with flexible pipe of 1.5mt
Double jet switch
Max height: 170 mm

RE 86051

**SHOWER MIXER**

In chromed brass
Complete with inlet case in white ABS
Inlet diameter: 55 mm
Max external diameter: 90 mm

RE 86052

**MIXER FOR SEPARATED SHOWERS**

Cold/hot mixer in chromed brass
Complete with inlet case in white ABS
Inlet diameter: 55 mm
Max external diameter: 90 mm

RE 86066

**SHOWER WITH HOSE**

If you push the switch the water flows. If you lift it you obtain a direct jet
Gained support in chromed brass and nylon
Reinforced white hose of 5 meters

RE 86011

**CERAMIC TAPS**

Single brass tap (only cold water)
Lowering and folding pipe
Max height: 210 mm
Width: 90 mm

RE 86053

**CERAMIC TAPS**

Brass mixer (hot and cold water)
Lowering and folding pipe. For closed sink
Max height: 210 mm
Max proj: 240 mm

RE 86054

**MIGNON SERIES**

Single Brass (only cold water) with folding spout
Max height: 180 mm
Max proj: 180 mm

RE 86055

**MIGNON SERIES**

Mixer Brass (hot & cold water) with folding spout
Max height: 140 mm
Max proj: 190 mm

RE 86056

**LEVER SHOWER**

Gained support in chromed brass and nylon
If you push the switch the water flows
If you lift it you obtain a direct jet
Reinforced white hose of 2 meters
Max height: 140 mm

RE 86057

**PUSH-BUTTON SHOWER**

Shower with push button
With inlet case, cover and 2 meters hose
Inlet diameter: 58 mm
Max external diameter: 95 mm

RE 86058

**TRIGGER SHOWER**


In white ABS with 45° curve in chromed brass
If you push the switch the water flows
If you lift it you obtain a direct jet
Gained support in chromed brass and nylon
Reinforced white hose of 2 meters
Max height: 90mm
Max proj: 130 mm

RE 86061



WASTE MANAGEMENT SYSTEM

Heavy duty macerator evacuation pump (50890 series)
 Ready to install with inlet, outlet and vent hose
 connection to 1 1/2"
 Hard mounting strap
 Level indicator (optional)
 Maximum elevation head 4 m
 Capacity 19 lt/min
 Self priming pump
 Pumping soil and waste water

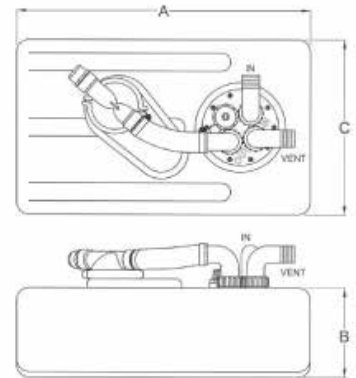

| Model | Tank capacity | Voltage | Fuse | Length (A) | Width (C) | Height (B) | Pump capacity | Hose | Code |
|-----------|---------------|---------|------|------------|-----------|------------|---------------|--------|----------|
| 324004012 | 41 lt | 12 V | 10 A | 650 mm | 390 mm | 200 mm | 19 lt/min | 1 1/2" | RE 86135 |
| 324006012 | 63 lt | 12 V | 10 A | 950 mm | 390 mm | 200 mm | 19 lt/min | 1 1/2" | RE 86136 |
| 324006024 | 63 lt | 24 V | 5 A | 950 mm | 390 mm | 200 mm | 19 lt/min | 1 1/2" | RE 86137 |
| 324010012 | 103 lt | 12 V | 10 A | 1050 mm | 390 mm | 200 mm | 19 lt/min | 1 1/2" | RE 86138 |
| 324010024 | 103 lt | 24 V | 5 A | 1050 mm | 390 mm | 200 mm | 19 lt/min | 1 1/2" | RE 86139 |



WASTE WATER KIT

Includes tank + macerator + accessories
 Polythene waste tank according to ISO 8099 regulation
 Complete with 8 joints on both sides: 4 of 3/4 e 4 1/2" for charge, discharge and breather
 KIT includes: macerator, gas tank vent, activated carbon filter and control panel
 The filter should be installed along the breather of the tank in the highest possible location
 The activated carbons should never come into contact with the liquids in the tank
 The Y-valve must be ordered separately
 24V power supply on request

RECTANGULAR TANK

| Capacity | Voltage | Length | Width | Height | Code |
|----------|---------|--------|--------|--------|----------|
| 47 lt | 12 V | 480 mm | 400 mm | 330 mm | RE 86091 |
| 72 lt | 12 V | 700 mm | 400 mm | 300 mm | RE 86092 |
| 112 lt | 12 V | 700 mm | 800 mm | 200 mm | RE 86093 |

BREVELLED TANK

| Capacity | Voltage | Length | Width | Height | Code |
|----------|---------|---------|--------|--------|----------|
| 50 lt | 12 V | 530 mm | 430 mm | 290 mm | RE 86094 |
| 75 lt | 12 V | 800 mm | 430 mm | 290 mm | RE 86095 |
| 98 lt | 12 V | 1050 mm | 430 mm | 290 mm | RE 86096 |